

**STATE OF UTAH**  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

FORM 3

AMENDED REPORT ☐  
(highlight changes)

<b>APPLICATION FOR PERMIT TO DRILL</b>				5. MINERAL LEASE NO: <b>ML-46532</b>	6. SURFACE: State
1A. TYPE OF WORK:    DRILL <input checked="" type="checkbox"/> REENTER <input type="checkbox"/> DEEPEN <input type="checkbox"/>				7. IF INDIAN, ALLOTTEE OR TRIBE NAME:	
B. TYPE OF WELL:    OIL <input type="checkbox"/> GAS <input checked="" type="checkbox"/> OTHER _____    SINGLE ZONE <input type="checkbox"/> MULTIPLE ZONE <input checked="" type="checkbox"/>				8. UNIT or CA AGREEMENT NAME:	
2. NAME OF OPERATOR: <b>KERR McGEE OIL &amp; GAS ONSHORE L.P.</b>				9. WELL NAME and NUMBER: <b>LOVE 1121-16E</b>	
3. ADDRESS OF OPERATOR: <b>1368 S 1200 E</b> CITY <b>VERNAL</b> STATE <b>UT</b> ZIP <b>84078</b>			PHONE NUMBER: <b>(435) 781-7024</b>	10. FIELD AND POOL, OR WILDCAT: <b>UNDESIGNATED</b>	
4. LOCATION OF WELL (FOOTAGES) AT SURFACE: <b>1598'FNL, 1241'FEL</b> AT PROPOSED PRODUCING ZONE: <b>W 621736X 39.863418 4413358Y -109.576742</b>				11. QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: <b>SWNW 16 11S 21E</b>	
14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE: <b>22 MILES SOUTHEAST OF OURAY, UTAH</b>				12. COUNTY: <b>UINTAH</b>	13. STATE: <b>UTAH</b>
15. DISTANCE TO NEAREST PROPERTY OR LEASE LINE (FEET) <b>1241'</b>		16. NUMBER OF ACRES IN LEASE: <b>320.00</b>		17. NUMBER OF ACRES ASSIGNED TO THIS WELL: <b>40.00</b>	
18. DISTANCE TO NEAREST WELL (DRILLING, COMPLETED, OR APPLIED FOR) ON THIS LEASE (FEET) <b>REFER TO TOPO C</b>		19. PROPOSED DEPTH: <b>8,770</b>		20. BOND DESCRIPTION: <b>RLB0005237</b>	
21. ELEVATIONS (SHOW WHETHER DF, RT, GR, ETC.): <b>5572'GL</b>		22. APPROXIMATE DATE WORK WILL START:		23. ESTIMATED DURATION:	

24. PROPOSED CASING AND CEMENTING PROGRAM							
SIZE OF HOLE	CASING SIZE, GRADE, AND WEIGHT PER FOOT			SETTING DEPTH	CEMENT TYPE, QUANTITY, YIELD, AND SLURRY WEIGHT		
12 1/4"	9 5/8	H-40	32.3#	1,600	265 SX CLASS G	1.18 YIELD	15.6 PPG
7 7/8"	4 1/2	I-80	11.6#	8,770	1890 SX 50/50 POZ	1.31 YIELD	14.3 PPG

25. ATTACHMENTS	
VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES:	
<input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER	<input checked="" type="checkbox"/> COMPLETE DRILLING PLAN
<input checked="" type="checkbox"/> EVIDENCE OF DIVISION OF WATER RIGHTS APPROVAL FOR USE OF WATER	<input type="checkbox"/> FORM 5, IF OPERATOR IS PERSON OR COMPANY OTHER THAN THE LEASE OWNER


NAME (PLEASE PRINT) <u>SHEILA UPCHEGO</u>	TITLE <u>SENIOR LAND ADMIN SPECIALIST</u>
SIGNATURE <u></u>	DATE <u>2/26/2007</u>

(This space for State use only)

API NUMBER ASSIGNED: 43-047-39144

**Approved by the  
Utah Division of  
Oil, Gas and Mining**

APPROVAL:

Date: 06-28-07  
(See Instructions on Reverse Side)  
By: 

**RECEIVED**


**MAR 16 2007**

DIV. OF OIL, GAS & MINING

*T11S, R21E, S.L.B.&M.*

# Kerr-McGee Oil & Gas Onshore LP

Well location, LOVE #1121-16E, located as shown in the SW 1/4 NW 1/4 of Section 16, T11S, R21E, S.L.B.&M., Uintah County, Utah.

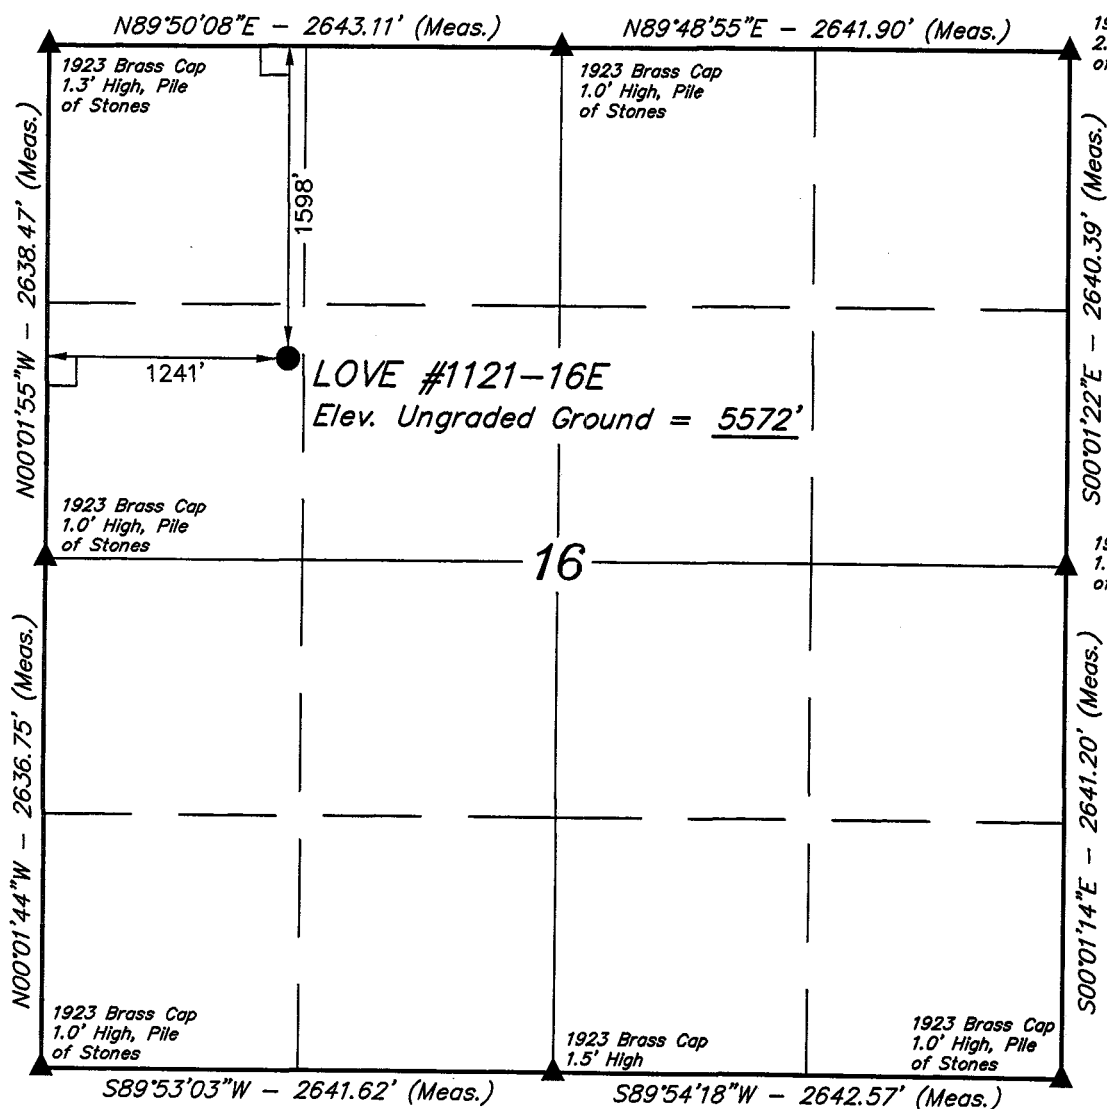


## BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.


## BASIS OF ELEVATION

SPOT ELEVATION AT THE SOUTHEAST CORNER OF SECTION 2, T11S, R21E, S.L.B.&M. TAKEN FROM THE BIG PACK MTN NE, QUADRANGLE, UTAH, UTAH COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 5584 FEET.

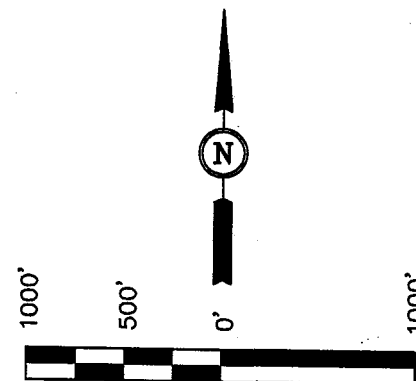

## SCALE CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.



**UINTAH ENGINEERING & LAND SURVEYING**  
85 SOUTH 200 EAST - VERNAL, UTAH 84078  
(435) 789-1017

## LEGEND:

- └─┘ = 90° SYMBOL
- = PROPOSED WELL HEAD.
- ▲ = SECTION CORNERS LOCATED.

(NAD 83)  
LATITUDE = 39°51'48.25" (39.863403)  
LONGITUDE = 109°34'38.64" (109.577400)  
(NAD 27)  
LATITUDE = 39°51'48.37" (39.863436)  
LONGITUDE = 109°34'36.17" (109.576714)

SCALE 1" = 1000'	DATE SURVEYED: 12-15-06	DATE DRAWN: 12-20-06
PARTY L.K. J.M. S.L.	REFERENCES G.L.O. PLAT	
WEATHER COOL	FILE Kerr-McGee Oil & Gas Onshore LP	

LOVE 1121-16E  
SW/NW SEC. 16, T11S, R21E  
UINTAH COUNTY, UTAH  
LEASE NUMBER: ML-46532

ONSHORE ORDER NO. 1

***DRILLING PROGRAM***

1. **Estimated Tops of Important Geologic Markers:**

<u>Formation</u>	<u>Depth</u>
Uinta	Surface
Green River	758'
Top of Birds Nest Water	994'
Mahogany	1504'
Wasatch	3833'
Mesa Verde	6640'
MVU2	7698'
MVU1	8218'
Total Depth	8770'

2. **Estimated Depths of Anticipated Water, Oil, Gas, or Mineral Formations:**

<u>Substance</u>	<u>Formation</u>	<u>Depth</u>
	Green River	758'
	Top of Birds Nest Water	994'
	Mahogany	1504'
Gas	Wasatch	3833'
Gas	Mesa Verde	6640'
Gas	MVU2	7698'
Gas	MVU1	8218'
Water	N/A	
Other Minerals	N/A	

3. **Pressure Control Equipment:**

*Please refer to the attached Drilling Program.*

4. **Proposed Casing & Cementing Program:**

*Please refer to the attached Drilling Program.*

5. **Drilling Fluids Program:**

*Please refer to the attached Drilling Program.*

6. **Evaluation Program:**

*Please refer to the attached Drilling Program.*

7. **Abnormal Conditions:**

Maximum anticipated bottomhole pressure at 8770' TD approximately equals 5437 psi (calculated at 0.62 psi/foot).

Maximum anticipated surface pressure equals approximately 3508 psi (bottomhole pressure minus the pressure of a partially evacuated hole calculated at 0.22 psi/foot).

8. **Anticipated Starting Dates & Notification of Operations:**

*Please refer to the attached Drilling Program.*

9. **Variances:**

*Please refer to the attached Drilling Program.*

10. **Other Information:**

*Please refer to the attached Drilling Program.*



GEOLOGICAL FORMATION			MECHANICAL		
LOGS	TOPS	DEPTH	HOLE SIZE	CASING SIZE	MUD WEIGHT
		40'		14"	
			12-1/4"	9-5/8", 32.3#, H-40, STC	Air mist
Catch water sample, if possible, from 0 to 3,833'					
	Green River @	0,758'			
	Top of Birds Nest Water @	994'			
	Mahogany @	1,504'			
	Preset f/ GL @				
		1,600' MD			
Note: 12.25" surface hole will usually be drilled ±400' below the bottom of lost circulation zone. Drilled depth may be ±200' of the estimated set depth depending on the actual depth of the loss zone.					
Mud logging program TBD Open hole logging program f/ TD - surf csg					
	Wasatch @	3,833'	7-7/8"	4-1/2", 11.6#, I-80 or equivalent LTC casing	Water/Fresh Water Mud 8.3-11.3 ppg
	Mverde @	6,640'			
	MVU2 @	7,698'			
	MVL1 @	8,218'			
					Max anticipated Mud required 11.3 ppg
	TD @	8,770'			



# KERR-McGEE OIL & GAS ONSHORE LP DRILLING PROGRAM

## CASING PROGRAM

	SIZE	INTERVAL	WT.	GR.	CPLG.	DESIGN FACTORS		
						BURST	COLLAPSE	TENSION
CONDUCTOR	14"	0-40'				2270	1370	254000
SURFACE	9-5/8"	0 to 1600	32.30	H-40	STC	0.70*****	1.83	5.61
						7780	6350	201000
PRODUCTION	4-1/2"	0 to 8770	11.60	I-80	LTC	2.41	1.23	2.26

- 1) Max Anticipated Surf. Press.(MASP) (Surface Casing) = (Pore Pressure at next csg point-(0.22 psi/ft-partial evac gradient x TVD of next csg point)  
2) MASP (Prod Casing) = Pore Pressure at TD - (.22 psi/ft-partial evac gradient x TD)  
(Burst Assumptions: TD = 11.3 ppg) .22 psi/ft = gradient for partially evac wellbore  
(Collapse Assumption: Fully Evacuated Casing, Max MW) (Tension Assumptions: Air Weight of Casing\*Buoy.Fact. of water)  
MASP 3224 psi

\*\*\*\*\* Burst SF is low but csg is much stronger than formation at 2000'. EMW @ 2000' for 2270# is 21.8 ppg or 1.13 psi/ft

## CEMENT PROGRAM

		FT. OF FILL	DESCRIPTION	SACKS	EXCESS	WEIGHT	YIELD
SURFACE	LEAD	500	Premium cmt + 2% CaCl + .25 pps flocele	215	60%	15.60	1.18
Option 1	TOP OUT CMT (1)	200	20 gals sodium silicate + Premium cmt + 2% CaCl + .25 pps flocele	50		15.60	1.18
	TOP OUT CMT (2)	as required	Premium cmt + 2% CaCl	as req.		15.60	1.18
SURFACE		<b>NOTE: If well will circulate water to surface, option 2 will be utilized</b>					
Option 2	LEAD	1500	Prem cmt + 16% Gel + 10 pps gilsonite +.25 pps Flocele + 3% salt BWOC	170	35%	11.00	3.82
	TAIL	500	Premium cmt + 2% CaCl + .25 pps flocele	180	35%	15.60	1.18
	TOP OUT CMT	as required	Premium cmt + 2% CaCl	as req.		15.60	1.18
PRODUCTION	LEAD	3,330'	Premium Lite II + 3% KCl + 0.25 pps celloflake + 5 pps gilsonite + 10% gel + 0.5% extender	370	60%	11.00	3.38
	TAIL	5,440'	50/50 Poz/G + 10% salt + 2% gel +.1% R-3	1520	60%	14.30	1.31

\*Substitute caliper hole volume plus 0% excess for LEAD if accurate caliper is obtained

\*Substitute caliper hole volume plus 10% excess for TAIL if accurate caliper is obtained

## FLOAT EQUIPMENT & CENTRALIZERS

SURFACE	Guide shoe, 1 jt, insert float. Centralize first 3 joints with bow spring centralizers. Thread lock guide shoe.
PRODUCTION	Float shoe, 1 jt, float collar. Centralize first 3 joints & every third joint to top of tail cement with bow spring centralizers.

## ADDITIONAL INFORMATION

Test casing head to 750 psi after installing. Test surface casing to 1,500 psi prior to drilling out.

BOPE: 11" 5M with one annular and 2 rams. Test to 5,000 psi (annular to 2,500 psi) prior to drilling out. Record on chart recorder & tour sheet. Function test rams on each trip. Maintain safety valve & inside BOP on rig floor at all times. Kelly to be equipped with upper & lower kelly valves.

Drop Totco surveys every 2000'. Maximum allowable hole angle is 5 degrees.

Most rigs have PVT Systems for mud monitoring. If no PVT is available, visual monitoring will be utilized.

DRILLING ENGINEER:

Brad Laney

DATE: \_\_\_\_\_


DRILLING SUPERINTENDENT:

Randy Bayne

LOVE1121-16E DHD.xls

DATE: \_\_\_\_\_

# 5M BOP STACK and CHOKE MANIFOLD SYSTEM

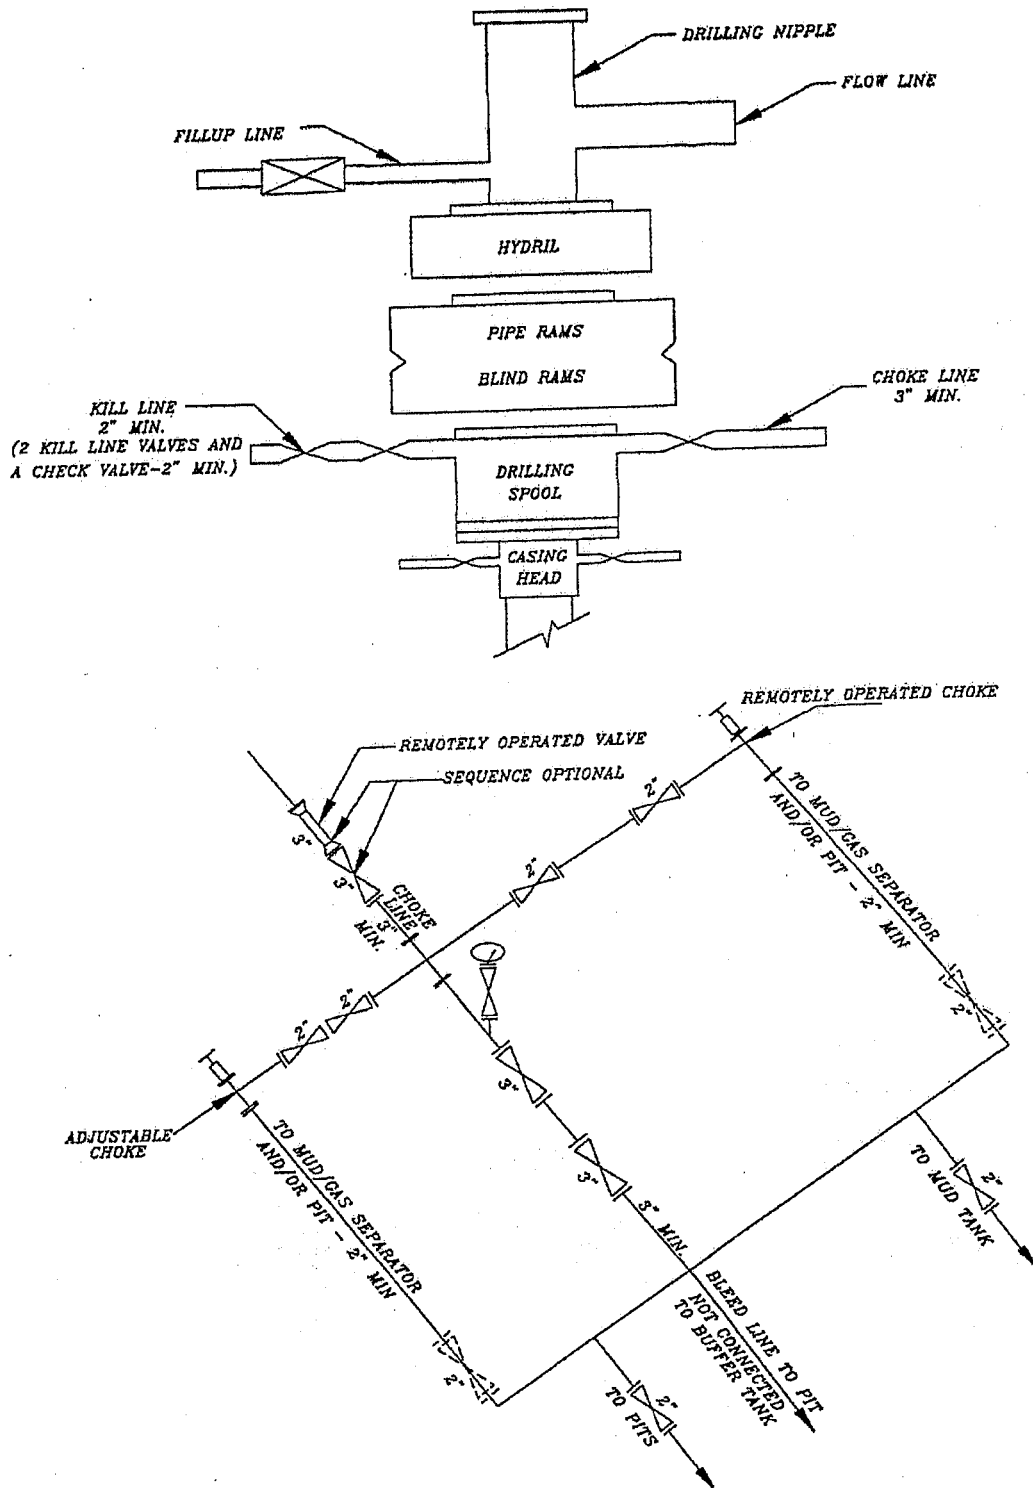

LOVE 1121-16E  
SE/NW SEC. 16, T11S, R21E  
Uintah County, UT  
ML-46532

ONSHORE ORDER NO. 1

***MULTI-POINT SURFACE USE & OPERATIONS PLAN***

**1. Existing Roads:**

Refer to Topo Map A for directions to the location.

Refer to Topo Maps A and B for location of access roads within a 2-mile radius.

Refer to Topo Maps A and B for location of access roads within a 2 mile radius.

All existing roads will be maintained and kept in good repair during all drilling and completion operations associated with this well.

**2. Planned Access Roads:**

Approximately 100' +/- of new access road is proposed. Refer to Topo Map B for the location of the proposed access road.

The upgraded and new portions of the access road will be crowned and ditched with a running surface of 18 feet and a maximum disturbed width of 30 feet. Appropriate water control will be installed to control erosion.

*Existence of pipelines; maximum grade; turnouts; major cut and fills, culverts, or bridges; gates, cattle guards, fence cuts, or modifications to existing facilities will be determined at the on-site.*

The access road was centerline flagged during time of staking.

Surfacing material may be necessary, depending upon weather conditions.

Surface disturbance and vehicular traffic will be limited to the approved location and approved access route. Any additional area needed will be approved in advance.

**3. Location of Existing Wells Within a 1-Mile Radius:**

Please refer to Topo Map C.

**4. Location of Existing & Proposed Facilities & Pipelines:**

*The following guidelines will apply if the well is productive.*

All production facilities will be located on the disturbed portion of the well pad and at a minimum of 25 feet from the toe of the back slope or the top of the fill slope.

A dike will be constructed completely around those production facilities which contain



fluids (i.e., production tanks, produced water tanks, and/or heater/treater). These dikes will be constructed of compacted subsoil, be impervious, hold 100% of the capacity of the largest tank, and be independent of the back cut.

All permanent (on-site six months or longer) above the ground structures constructed or installed, including pumping units, will be painted a flat, non-reflective, earthtone color to match one of the standard environmental colors, as determined by the five state Rocky Mountain Inter-Agency Committee.

All facilities will be painted within six months of installation. Facilities required to comply with the Occupational Safety and Health Act (OSHA) will be excluded. The required color is Carlsbad Canyon, standard color number 2.5Y 6/2.

Any necessary pits will be properly fenced to protect livestock and prevent wildlife entry.

Approximately 51' of up to 4" pipeline is proposed. The pipeline will be butt-welded together. Refer to Topo D for the proposed pipeline.

**5. Location and Type of Water Supply:**

Water for drilling purposes will be obtained from Dalbo Inc.'s underground well located in Ouray, Utah, Sec. 32, T4S, R3E, Water User Claim #43-8496, Application #53617.

Water will be hauled to location over the roads marked on Maps A and B.

No water well is to be drilled on this lease.

**6. Source of Construction Materials:**

Surface and subsoil materials in the immediate area will be utilized.

Any gravel will be obtained from a commercial source.

**7. Methods of Handling Waste Materials:**

Drill cuttings will be contained and buried in the reserve pit.

Drilling fluids, including salts and chemicals, will be contained in the reserve pit. Upon termination of drilling and completion operations, the liquid contents of the reserve pit will be removed and disposed of at an approved waste disposal facility within 120 days after drilling is terminated.

The reserve pit will be constructed on the location and will not be located within natural drainage, where a flood hazard exists or surface runoff will destroy or damage the pit walls. The reserve pit will be constructed so that it will not leak, break, or allow discharge of liquids.

A plastic reinforced liner and felt will be used, it will be a minimum of 16 mil thick, with sufficient bedding used to cover any rocks. The liner will overlap the pit walls and be covered with dirt and/or rocks to hold it in place. No trash or scrap that could puncture the liner will be disposed of in the pit.

Any spills of oil, gas, salt water, or other noxious fluids will be immediately cleaned up and removed to an approved disposal site.

A chemical porta-toilet will be furnished with the drilling rig.

Garbage, trash, and other waste materials will be collected in a portable, self-contained, fully enclosed trash cage during operations. No trash will be burned on location.

All debris and other waste material not contained in the trash cage will be cleaned up and removed from the location immediately after removal of the drilling rig.

Any open pits will be fenced during the operations. The fencing will be maintained until such time as the pits are backfilled.

No chemicals subject to reporting under SARA Title III (hazardous materials) in an amount greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.

Any produced water from the proposed well will be contained in a water tank and will then be hauled By truck to one of the pre-approved disposal sites: RNI, Sec. 5, T9S, R22E, NBU #159, Sec. 35, T9S, R21E, Ace Oilfield, Sec. 2, T6S, R20E, MC&MC, Sec. 12, T6S, R19E.

**8. Ancillary Facilities:**

None are anticipated.

**9. Well Site Layout: (See Location Layout Diagram)**

The attached Location Layout Diagram describes drill pad cross-sections, cuts and fills, and locations of the mud tanks, reserve pit, flare pit, pipe racks, trailer parking, spoil dirt stockpile(s), and surface material stockpile(s).

Please see the attached diagram to describe rig orientation, parking areas, and access roads.

The reserve pit will be lined, and when the reserve pit is closed, the pit liner will be buried below plow depth.

All pits will be fenced according to the following minimum standards:

39 inch net wire will be used with at least one strand of barbed wire on top of the net wire. Barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence.

The net wire shall be no more than two inches above the ground. The barbed wire shall be three inches over the net wire. Total height of the fence shall be at least 42 inches.

Corner posts shall be cemented and/or braced in such a manner to keep the fence tight at all times.

Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distance

between any 2 fence posts shall be no greater than 16 feet.

All wire shall be stretched, by using a stretching device, before it is attached to corner posts.

The reserve pit fencing will be on three sides during drilling operations, and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.

Location size may change prior to the drilling of the well due to current rig availability. If the proposed location is not large enough to accommodate the drilling rig the location will be re-surveyed and a Form 9 shall be submitted.

**10. Plans for Reclamation of the Surface:**

*Producing Location:*

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, materials, trash, and debris not required for production.

Immediately upon well completion, any hydrocarbons in the pit shall be removed in accordance with 43 CFR 3162.7-1.

A plastic, nylon reinforced liner will be used, it shall be torn and perforated before backfilling of the reserve pit.

Before any dirt work associated with location restoration takes place, the reserve pit shall be as dry as possible. All debris in it will be removed. Other waste and spoil materials will be disposed of immediately upon completion of operations.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours. The reserve pit will be reclaimed within 90 days from the date of well completion, weather permitting.

To prevent surface water (s) from standing (ponding) on the reclaimed reserve pit area, final reclamation of the reserve pit will consist of "mounding" the surface three feet above surrounding ground surface to allow the reclaimed pit area to drain effectively.

Upon completion of backfilling, leveling, and recontouring, the stockpiled topsoil will be spread evenly over the reclaimed area(s).

*Dry Hole/Abandoned Location:*

Abandoned well sites, roads, and other disturbed areas will be restored as near as practical to their original condition. Where applicable, these conditions include the re-establishment of irrigation systems, the re-establishment of appropriate soil conditions, and re-establishment of vegetation as specified.

All disturbed surfaces will be recontoured to the approximate natural contours, with reclamation of the well pad and access road to be performed as soon as practical after final abandonment. Reseeding operations will be performed after completion of other reclamation operations.

**11. Surface Ownership:**

SITLA  
675 East 500 South, Suite 500  
Salt Lake City, UT 84102

**12. Other Information:**

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, the approved Plan of Operations, and any applicable Notice of Lessees. The Operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished to the field representative to ensure compliance.

The Operator will control noxious weeds along Rights-Of-Way for roads, pipelines, well sites, or other applicable facilities.

A Class III archaeological survey will be submitted when it is received by our office.

This location is not within 460' from the boundary of the Love Unit, nor is it within 460' of any non-committed tract lying within the boundaries of the Unit.

**13. Lessee's or Operators's Representative & Certification:**

Sheila Upchego  
Senior Land Admin Specialist  
Kerr-McGee Oil & Gas Company L.P.  
1368 South 1200 East  
Vernal, UT 84078  
(435) 781-7024

Randy Bayne  
Drilling Manager  
Kerr-McGee Oil & Gas Company L.P.  
1368 South 1200 East  
Vernal, UT 84078  
(435)781-7018

Certification: All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approved Plan of Operations, and any applicable Notice to Lessees.

The Operator will be fully responsible for the actions of its subcontractors. A complete copy of the approved "Application for Permit to Drill" will be furnished to the field representative(s) to ensure compliance and shall be on location during all construction and drilling operations.

Kerr-McGee Oil & Gas Company L.P. is considered to be the operator of the subject well. Kerr-McGee Oil & Gas Company L.P., agrees to be responsible under terms and conditions of the lease for the operations conducted upon leased lands.

Bond coverage pursuant to 43 CFR 3104 for lease activities is being provided by State Surety Bond #RLB0005237.

I hereby certify that I, or persons under my supervision, have inspected the proposed drill site and access route, that I am familiar with the conditions that currently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and the work associated with the operations proposed herein will be performed by the Operator, its contractors, and subcontractors in conformity with this plan and the terms and conditions under which it is approved.

  
Sheila Upchego

2/26/07

Date

**Kerr-McGee Oil & Gas Onshore LP**  
**LOVE #1121-16E**  
**SECTION 16, T11S, R21E, S.L.B.&M.**

PROCEED IN A WESTERLY DIRECTION FROM VERNAL, UTAH ALONG U.S. HIGHWAY 40 APPROXIMATELY 14.0 MILES TO THE JUNCTION OF STATE HIGHWAY 88; EXIT LEFT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 17.0 MILES TO OURAY, UTAH; PROCEED IN A SOUTHERLY, THEN SOUTHEASTERLY DIRECTION APPROXIMATELY 11.2 MILES ON THE SEEP RIDGE ROAD TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHEAST; TURN RIGHT AND PROCEED IN AN SOUTHEASTERLY, THEN SOUTHERLY DIRECTION APPROXIMATELY 4.1 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN LEFT AND PROCEED IN AN EASTERLY DIRECTION APPROXIMATELY 1.3 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTH; TURN RIGHT AND PROCEED IN A SOUTHERLY THEN SOUTHEASTERLY DIRECTION APPROXIMATELY 2.9 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHWEST; TURN RIGHT AND PROCEED IN A SOUTHWESTERLY, THEN NORTHWESTERLY DIRECTION APPROXIMATELY 0.3 MILES TO THE EXISTING #B1-10; PROCEED IN A NORTHWESTERLY, THEN SOUTHERLY, THEN SOUTHWESTERLY, THEN WESTERLY DIRECTION APPROXIMATELY 2.2 MILES TO THE BEGINNING OF THE PROPOSED ROAD ACCESS TO THE SOUTHWEST; FOLLOW ROAD FLAGS IN A SOUTHWESTERLY DIRECTION APPROXIMATELY 190' TO THE PROPOSED LOCATION.

TOTAL DISTANCE FROM VERNAL, UTAH TO THE PROPOSED WELL LOCATION IS APPROXIMATELY 53.0 MILES.



# Kerr-McGee Oil & Gas Onshore LP

## LOVE #1121-16E

LOCATED IN UTAH COUNTY, UTAH  
SECTION 16, T11S, R21E, S.L.B.&M.



PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: NORTHEASTERLY



PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS

CAMERA ANGLE: SOUTHWESTERLY



- Since 1964 -

**UELS** Uintah Engineering & Land Surveying  
85 South 200 East Vernal, Utah 84078  
435-789-1017 uels@uelsinc.com

**LOCATION PHOTOS**


**12 19 06**  
MONTH DAY YEAR

**PHOTO**

TAKEN BY: L.K.

DRAWN BY: B.C.

REVISED: 00-00-00

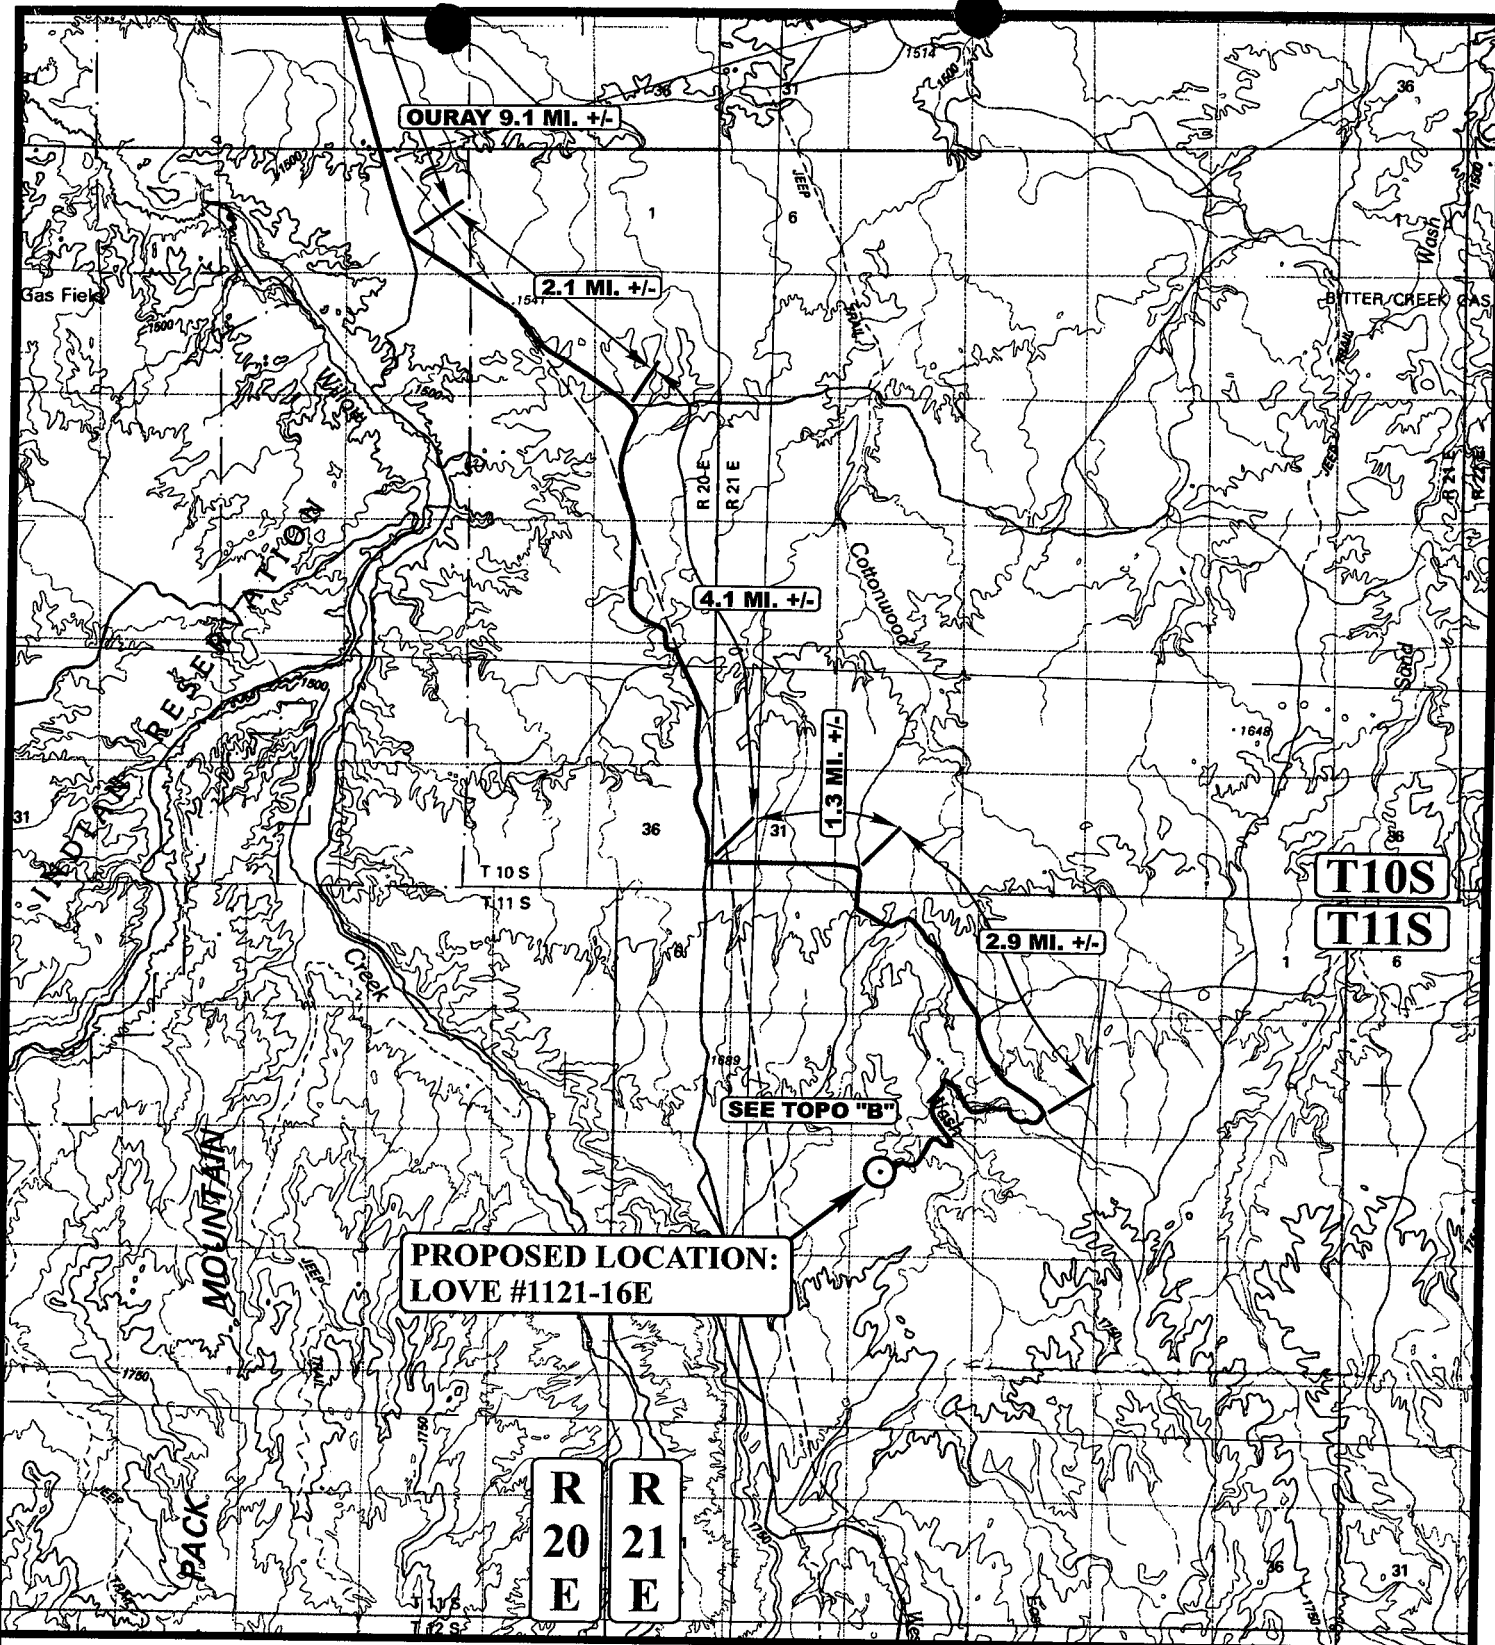

# **LEGEND:**

○ PROPOSED LOCATION



**Kerr-McGee Oil & Gas Onshore LP**

**LOVE #1121-16E**

**SECTION 16, T11S, R21E, S.L.B.&M.**

**1598' FNL 1241' FWL**



**Uintah Engineering & Land Surveying**  
85 South 200 East Vernal, Utah 84078  
(435) 789-1017 \* FAX (435) 789-1813


**TOPOGRAPHIC**  
**MAP**

**12 19 06**  
MONTH DAY YEAR

**SCALE: 1:100,000** **DRAWN BY: B.C.** **REVISED: 00-00-00**





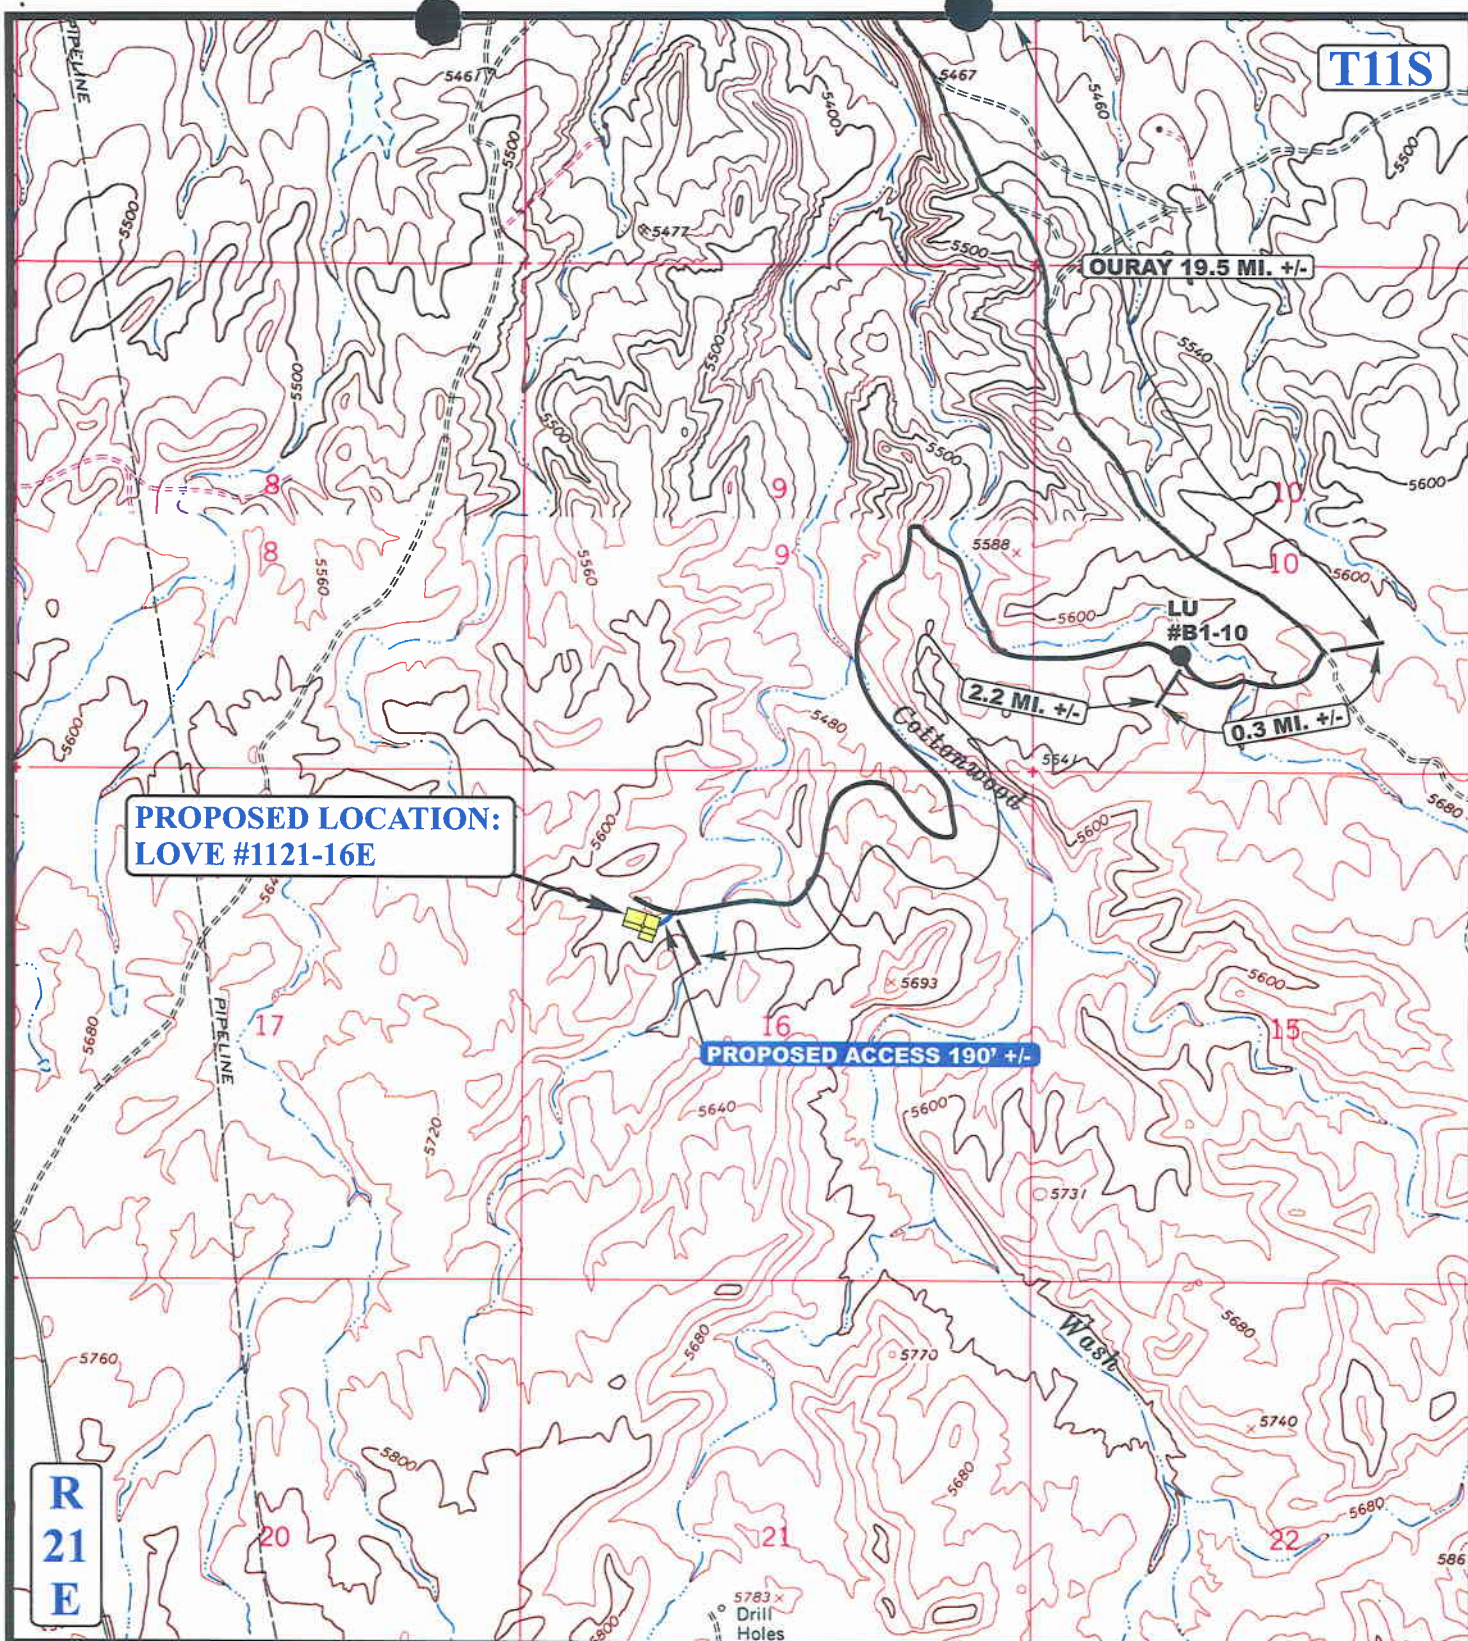

# LEGEND:

— EXISTING ROAD  
 - - - PROPOSED ACCESS ROAD

Kerr-McGee Oil & Gas Onshore LP


LOVE #1121-16E  
 SECTION 16, T11S, R21E, S.L.B.&M.  
 1598' FNL 1241' FWL

**U E I S**  
 Uintah Engineering & Land Surveying  
 85 South 200 East Vernal, Utah 84078  
 (435) 789-1017 \* FAX (435) 789-1813

**TOPOGRAPHIC** 12 19 06  
**MAP** MONTH DAY YEAR  
 SCALE: 1" = 2000' DRAWN BY: B.C. REVISED: 00-00-00

**B**  
 TOPO



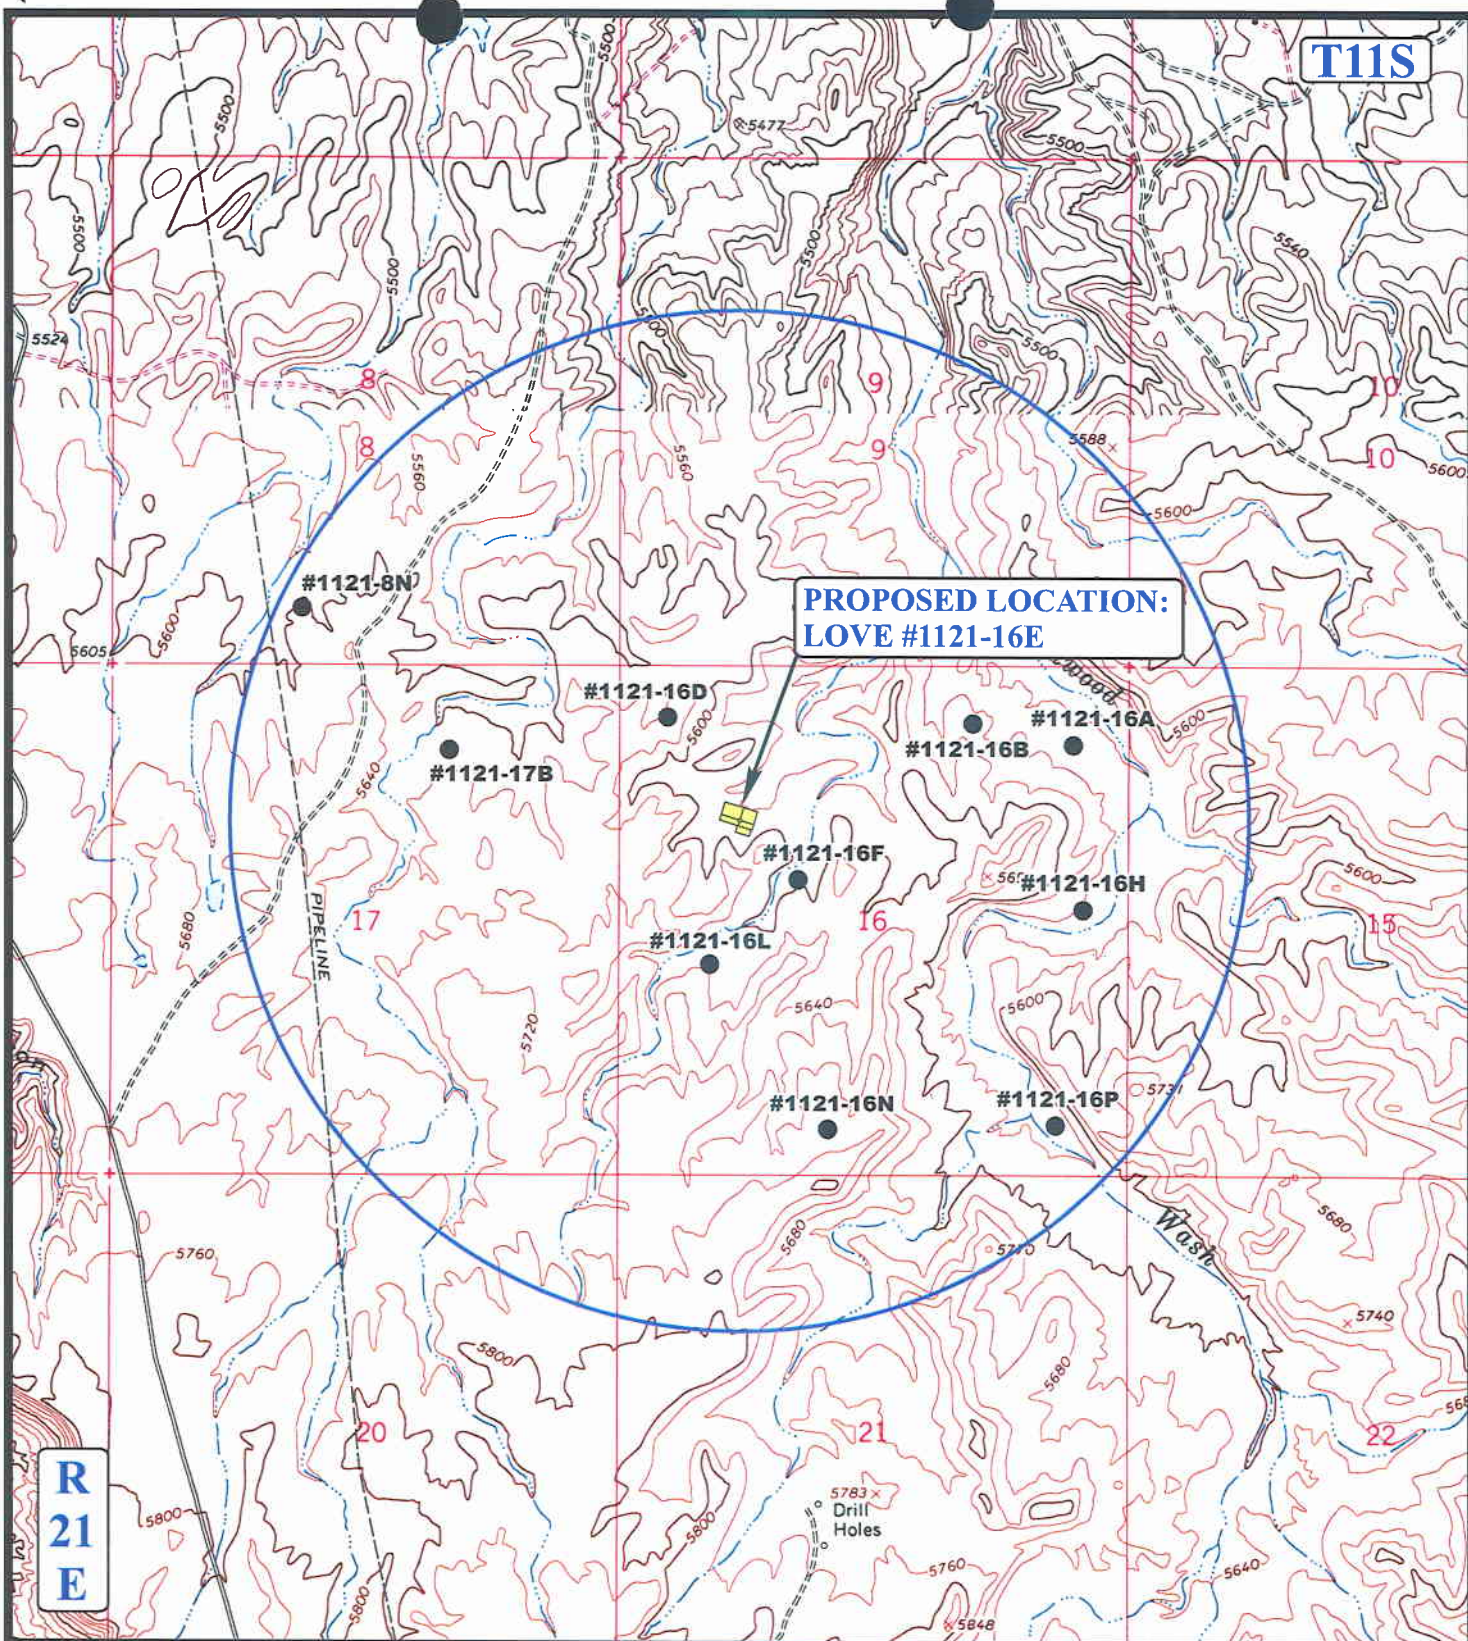

# LEGEND:

- DISPOSAL WELLS
- PRODUCING WELLS
- SHUT IN WELLS
- WATER WELLS
- ABANDONED WELLS
- TEMPORARILY ABANDONED

Kerr-McGee Oil & Gas Onshore LP

LOVE #1121-16E  
SECTION 16, T11S, R21E, S.L.B.&M.  
1598' FNL 1241' FWL



Uintah Engineering & Land Surveying  
85 South 200 East Vernal, Utah 84078  
(435) 789-1017 \* FAX (435) 789-1813




TOPOGRAPHIC  
MAP

12 19 06  
MONTH DAY YEAR

SCALE: 1" = 2000' DRAWN BY: B.C. REVISED: 00-00-00





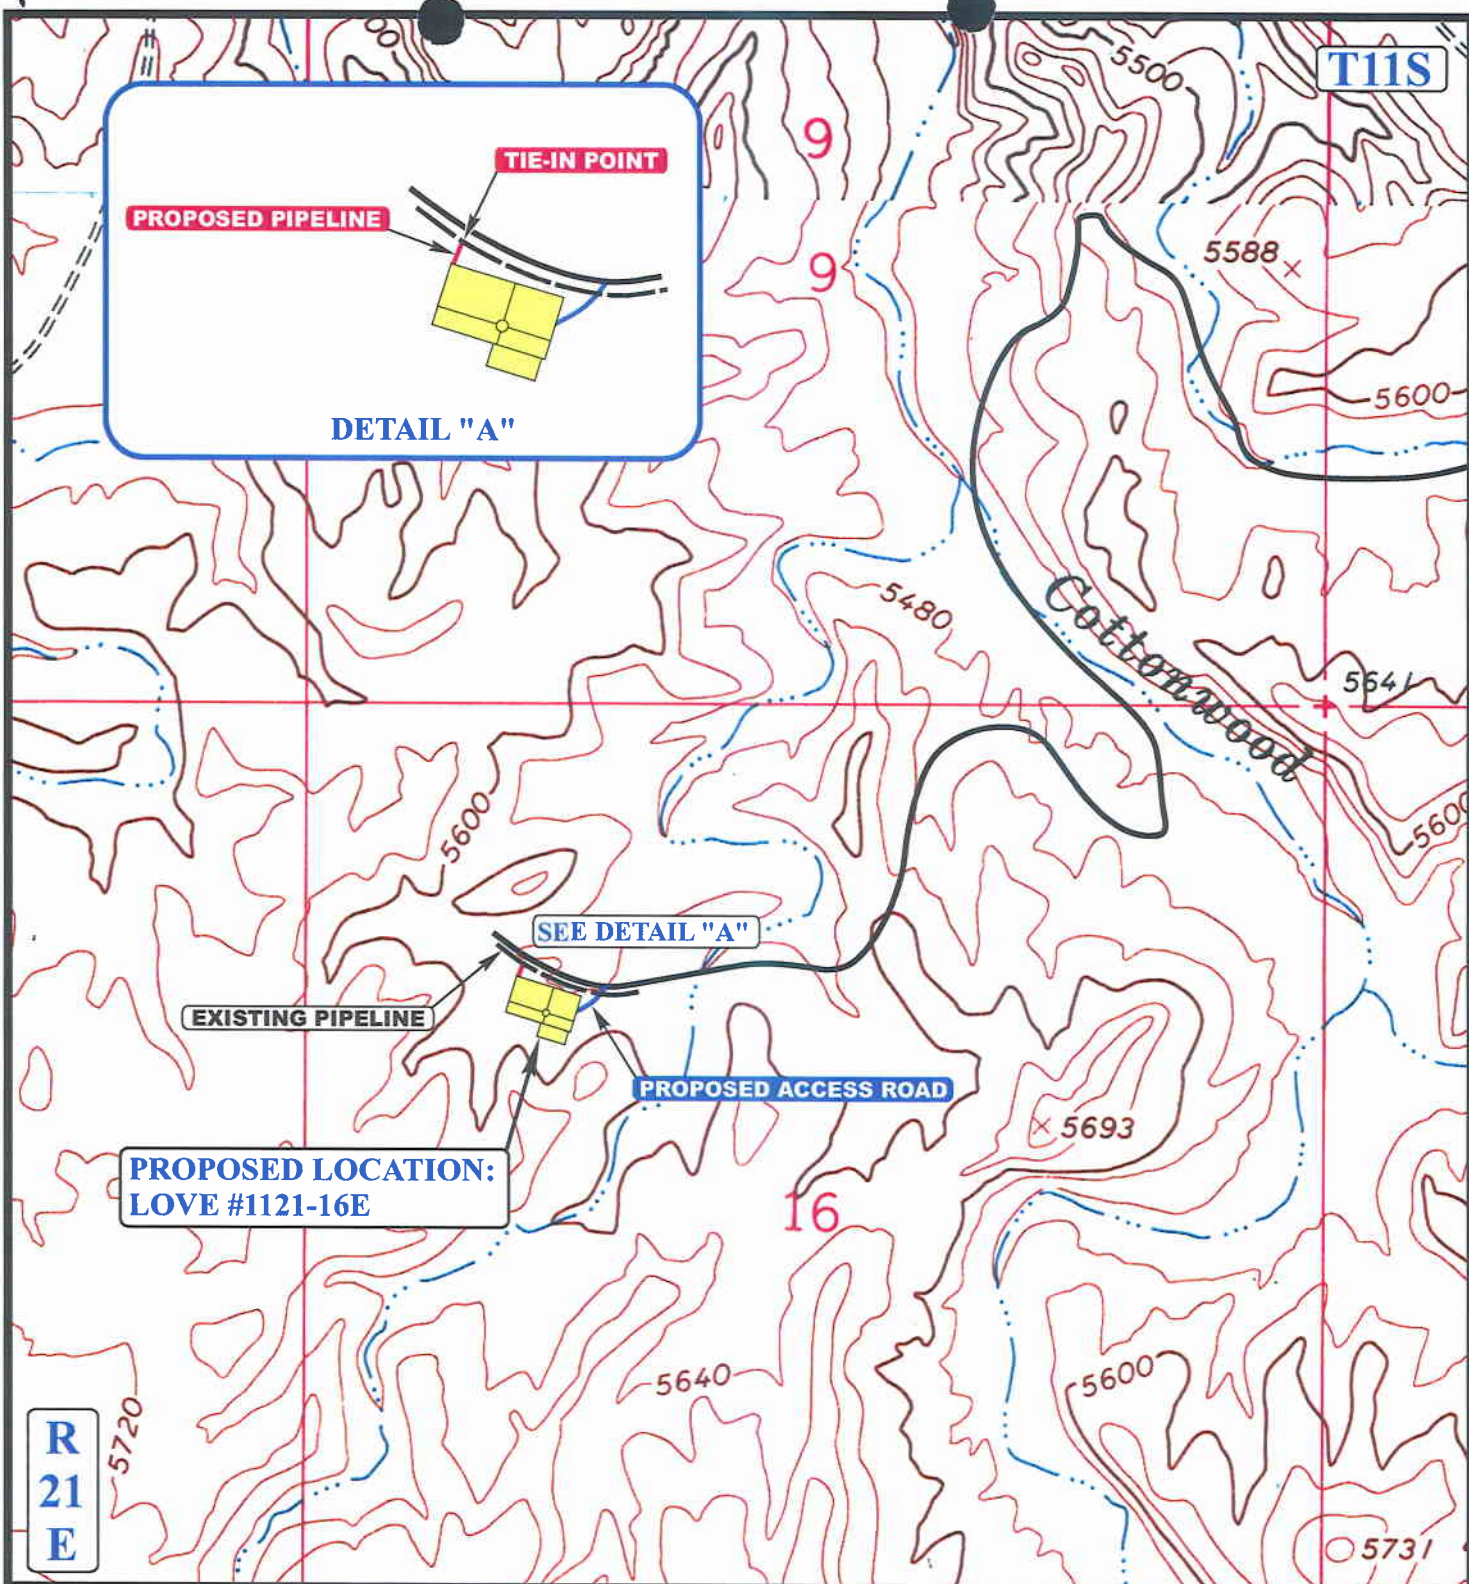

**APPROXIMATE TOTAL PIPELINE DISTANCE = 51' +/-**

**LEGEND:**

- PROPOSED ACCESS ROAD
- EXISTING PIPELINE
- PROPOSED PIPELINE



**Kerr-McGee Oil & Gas Onshore LP**

**LOVE #1121-16E**  
**SECTION 16, T11S, R21E, S.L.B.&M.**  
**1598' FNL 1241' FWL**



**Uintah Engineering & Land Surveying**  
85 South 200 East Vernal, Utah 84078  
(435) 789-1017 \* FAX (435) 789-1813

**TOPOGRAPHIC** **12** **19** **06**  
**MAP** MONTH DAY YEAR  
SCALE: 1" = 1000' DRAWN BY: B.C. REVISED: 00-00-00





# Kerr-McGee Oil & Gas Onshore LP

LOVE #1121-16E

PIPELINE ALIGNMENT

LOCATED IN UINTAH COUNTY, UTAH

SECTION 16, T11S, R21E, S.L.B.&M.



PHOTO: VIEW OF TIE-IN POINT

CAMERA ANGLE: SOUTHWESTERLY



PHOTO: VIEW OF PIPELINE ALIGNMENT

CAMERA ANGLE: SOUTHWESTERLY



- Since 1964 -

**UELS** Uintah Engineering & Land Surveying  
85 South 200 East Vernal, Utah 84078  
435-789-1017 uels@uelsinc.com

PIPELINE PHOTOS

12  
MONTH

19  
DAY

06  
YEAR

PHOTO

TAKEN BY: L.K.

DRAWN BY: B.C.


REVISED: 00-00-00

# Kerr-McGee Oil & Gas Onshore LP

## LOCATION LAYOUT FOR

LOVE #1121-16E  
SECTION 16, T11S, R21E, S.L.B.&M.  
1598' FNL 1241' FWL'


CONSTRUCT  
DIVERSION  
DITCH



SCALE: 1" = 50'  
DATE: 12-20-06  
Drawn By: S.L.

### NOTE:

Flare Pit is to be located  
a min. of 100' from the  
Well Head.

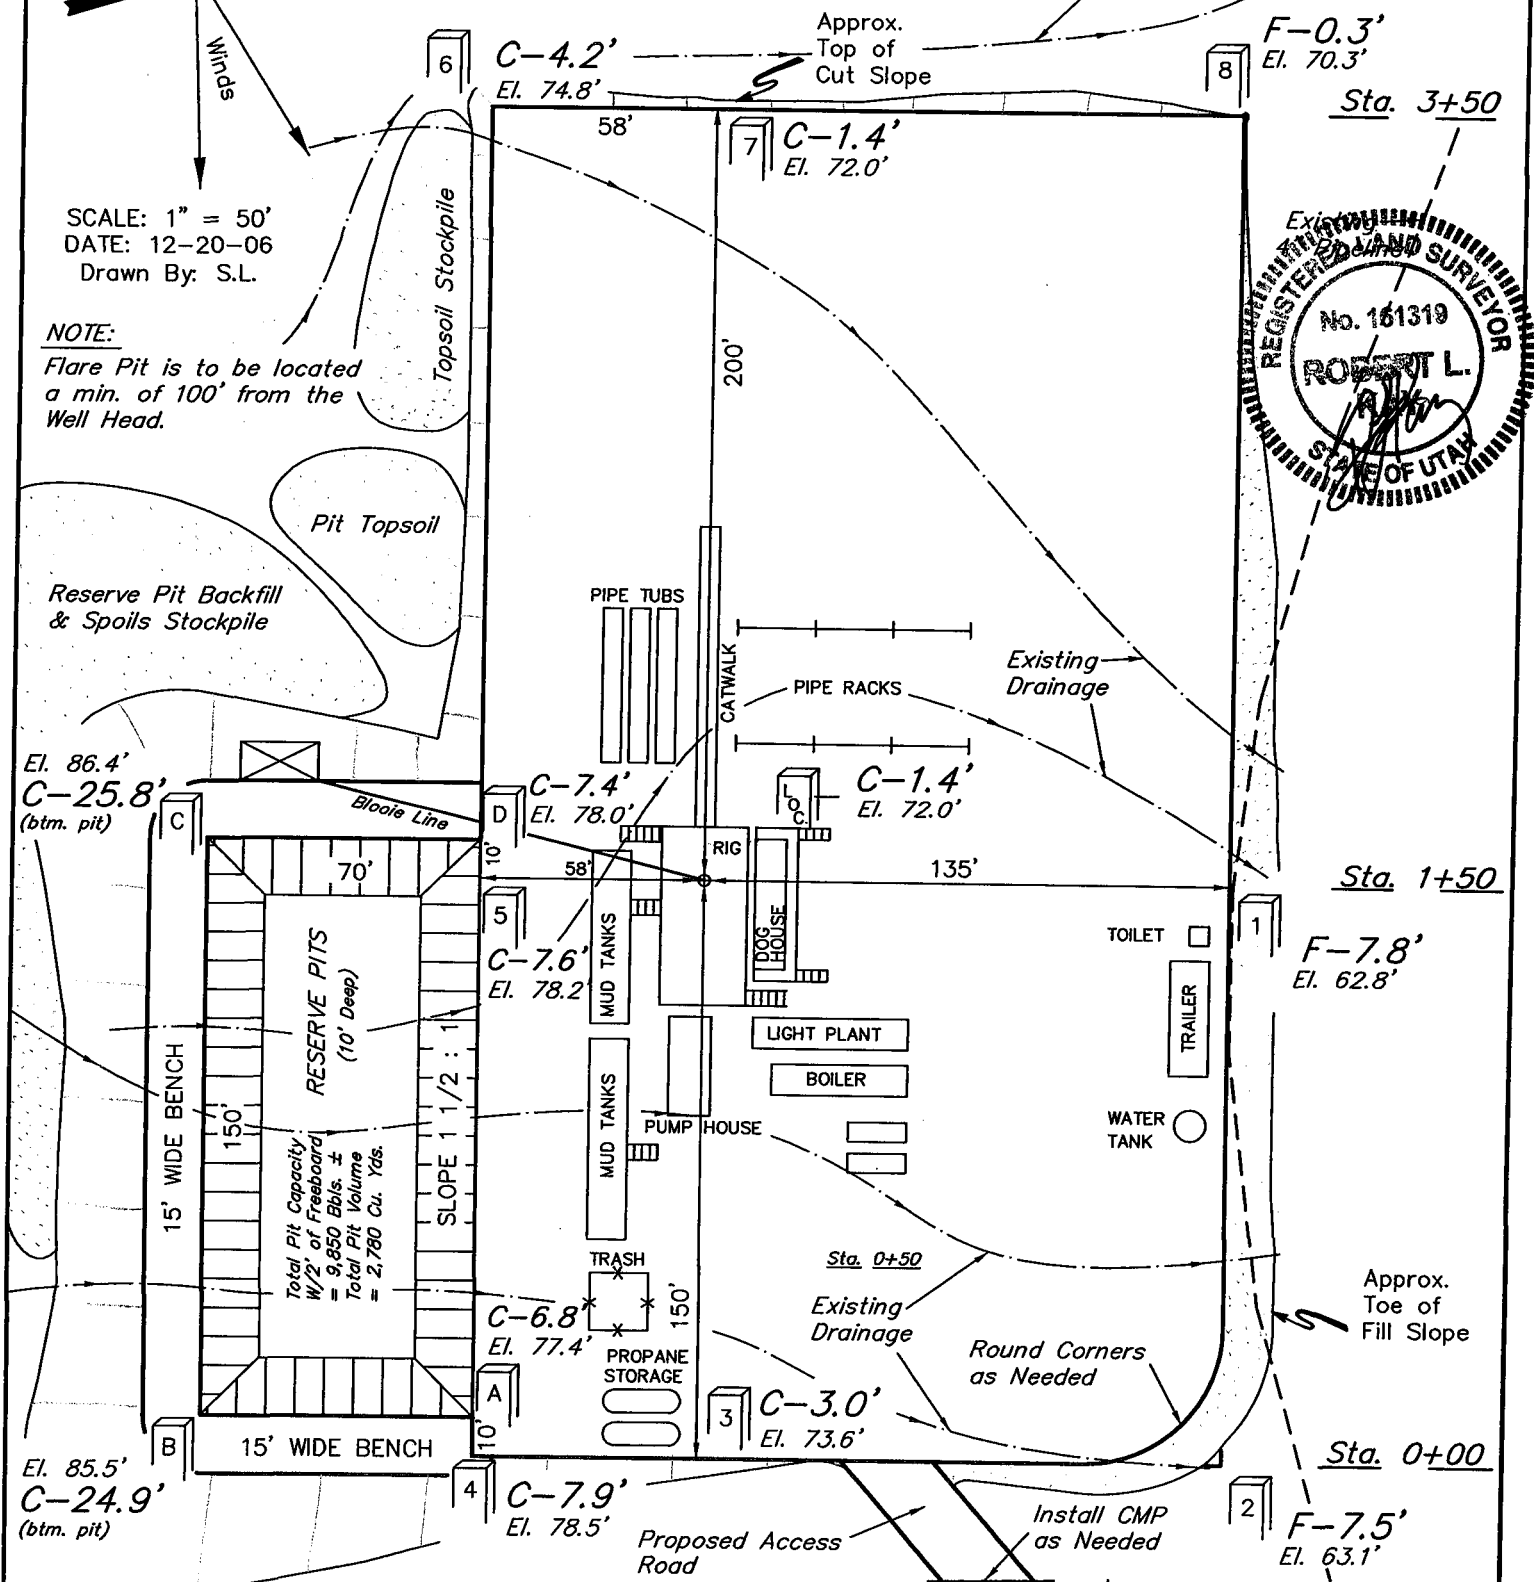

### NOTES:

Elev. Ungraded Ground At Loc. Stake = 5572.0'  
FINISHED GRADE ELEV. AT LOC. STAKE = 5570.6'

CONSTRUCT  
DIVERSION  
DITCH

FIGURE #1

UINTAH ENGINEERING & LAND SURVEYING  
85 So. 200 East \* Vernal, Utah 84078 \* (435) 789-1017

# Kerr-McGee Oil & Gas Onshore LP

FIGURE #2

## TYPICAL CROSS SECTIONS FOR


LOVE #1121-16E

SECTION 16, T11S, R21E, S.L.B.&M.

1598' FNL 1241' FWL'

1" = 20'  
X-Section  
Scale  
1" = 50'

DATE: 12-20-06  
Drawn By: S.L.

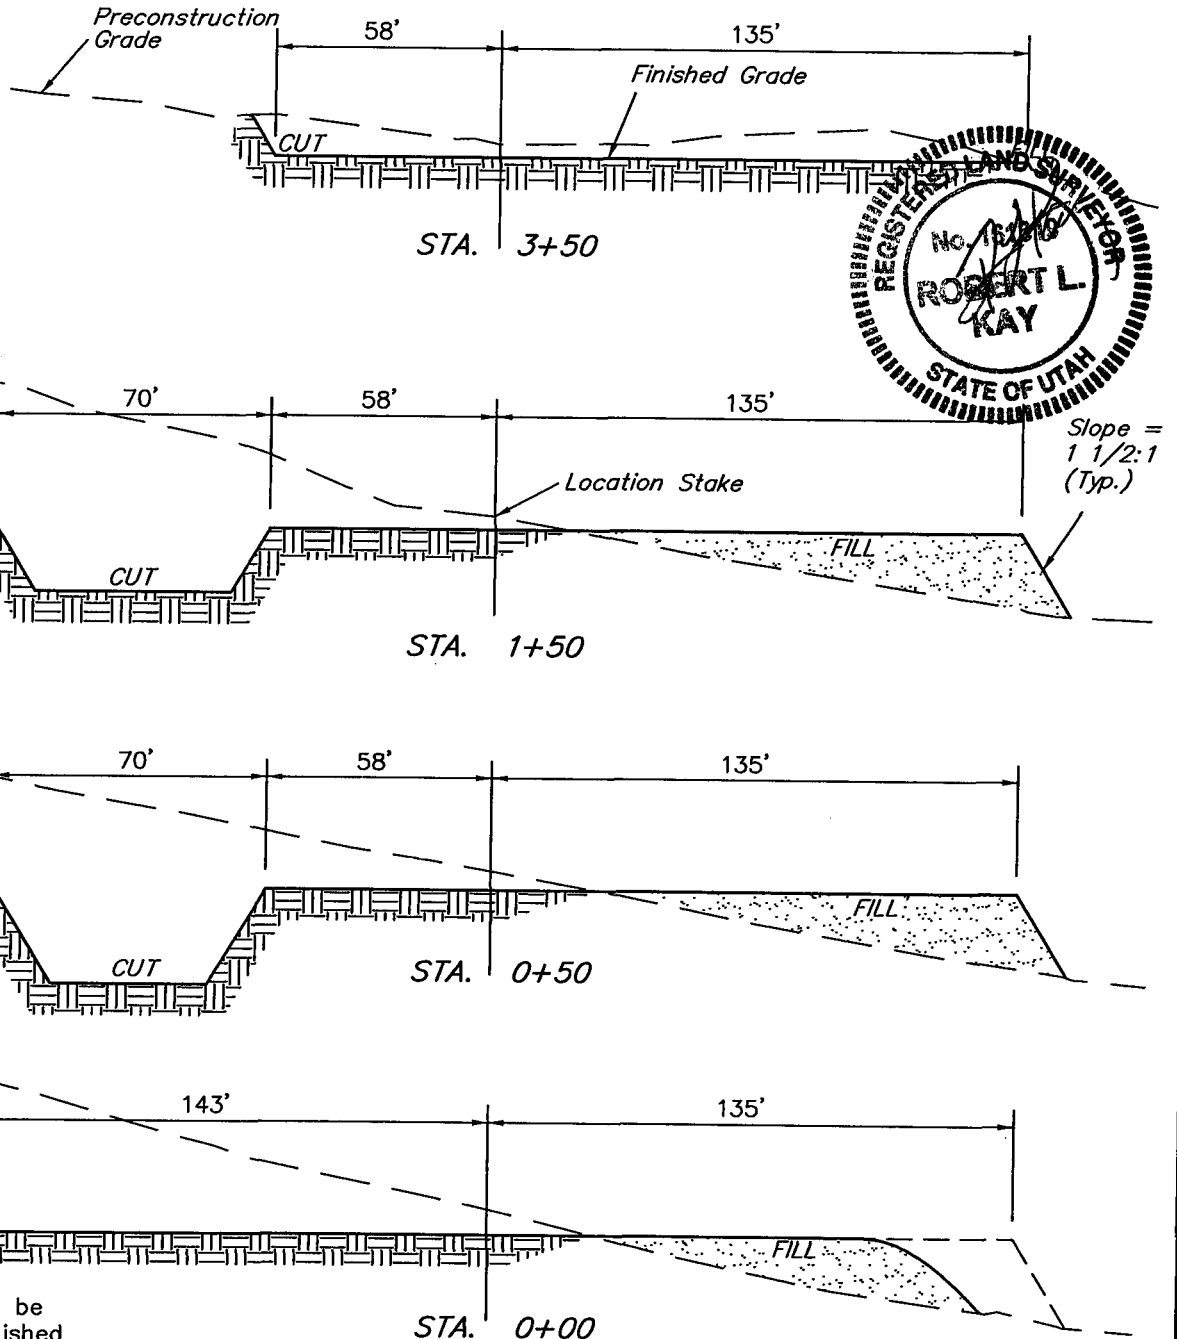

### NOTE:

Topsoil should not be Stripped Below Finished Grade on Substructure Area.

### \* NOTE:

FILL QUANTITY INCLUDES 5% FOR COMPACTION

### APPROXIMATE YARDAGES

#### CUT

(6") Topsoil Stripping = 1,880 Cu. Yds.  
Remaining Location = 12,590 Cu. Yds.

TOTAL CUT = 14,470 CU.YDS.

FILL = 6,690 CU.YDS.

EXCESS MATERIAL = 7,780 Cu. Yds.

Topsoil & Pit Backfill = 3,270 Cu. Yds.  
(1/2 Pit Vol.)

EXCESS UNBALANCE = 4,510 Cu. Yds.  
(After Interim Rehabilitation)

UINTAH ENGINEERING & LAND SURVEYING  
85 So. 200 East \* Vernal, Utah 84078 \* (435) 789-1017

**WORKSHEET**  
**APPLICATION FOR PERMIT TO DRILL**

APD RECEIVED: 03/16/2007

API NO. ASSIGNED: 43-047-39144

WELL NAME: LOVE 1121-16E

OPERATOR: KERR-MCGEE OIL & GAS ( N2995 )

PHONE NUMBER: 435-781-7024

CONTACT: SHEILA UPCHEGO

PROPOSED LOCATION:

SWNW 16 110S 210E

SURFACE: 1598 FNL 1241 FWL

BOTTOM: 1598 FNL 1241 FWL

COUNTY: Uintah

LATITUDE: 39.86342 LONGITUDE: -109.5767

UTM SURF EASTINGS: 621736 NORTHINGS: 4413358

FIELD NAME: UNDESIGNATED ( 2 )

INSPECT LOCATN BY: / /

Tech Review

Initials

Date

Engineering

DKD

4/24/07

Geology

Surface

LEASE TYPE: 3 - State

LEASE NUMBER: ML-46532

PROPOSED FORMATION: WSMVD

SURFACE OWNER: 3 - State

COALBED METHANE WELL? NO

RECEIVED AND/OR REVIEWED:

☒ Plat

☒ Bond: Fed[] Ind[] Sta[] Fee[]  
(No. 22013542 )

☒ Potash (Y/N)

☒ Oil Shale 190-5 (B) or 190-3 or 190-13

☒ Water Permit  
(No. 43-8496 )

☒ RDCC Review (Y/N)  
(Date: )

☒ Fee Surf Agreement (Y/N)

☒ Intent to Commingle (Y/N)

LOCATION AND SITING:

\_\_\_ R649-2-3.

Unit: \_\_\_\_\_

\_\_\_ R649-3-2. General

Siting: 460 From Qtr/Qtr & 920' Between Wells

☒ R649-3-3. Exception

\_\_\_ Drilling Unit

Board Cause No: \_\_\_\_\_

Eff Date: \_\_\_\_\_

Siting: \_\_\_\_\_

\_\_\_ R649-3-11. Directional Drill


COMMENTS:

Needs Quest (04-04-07)

STIPULATIONS:

1- Spacing Strip  
2- Statement of Basis  
3- Surface Csg Cart Strip



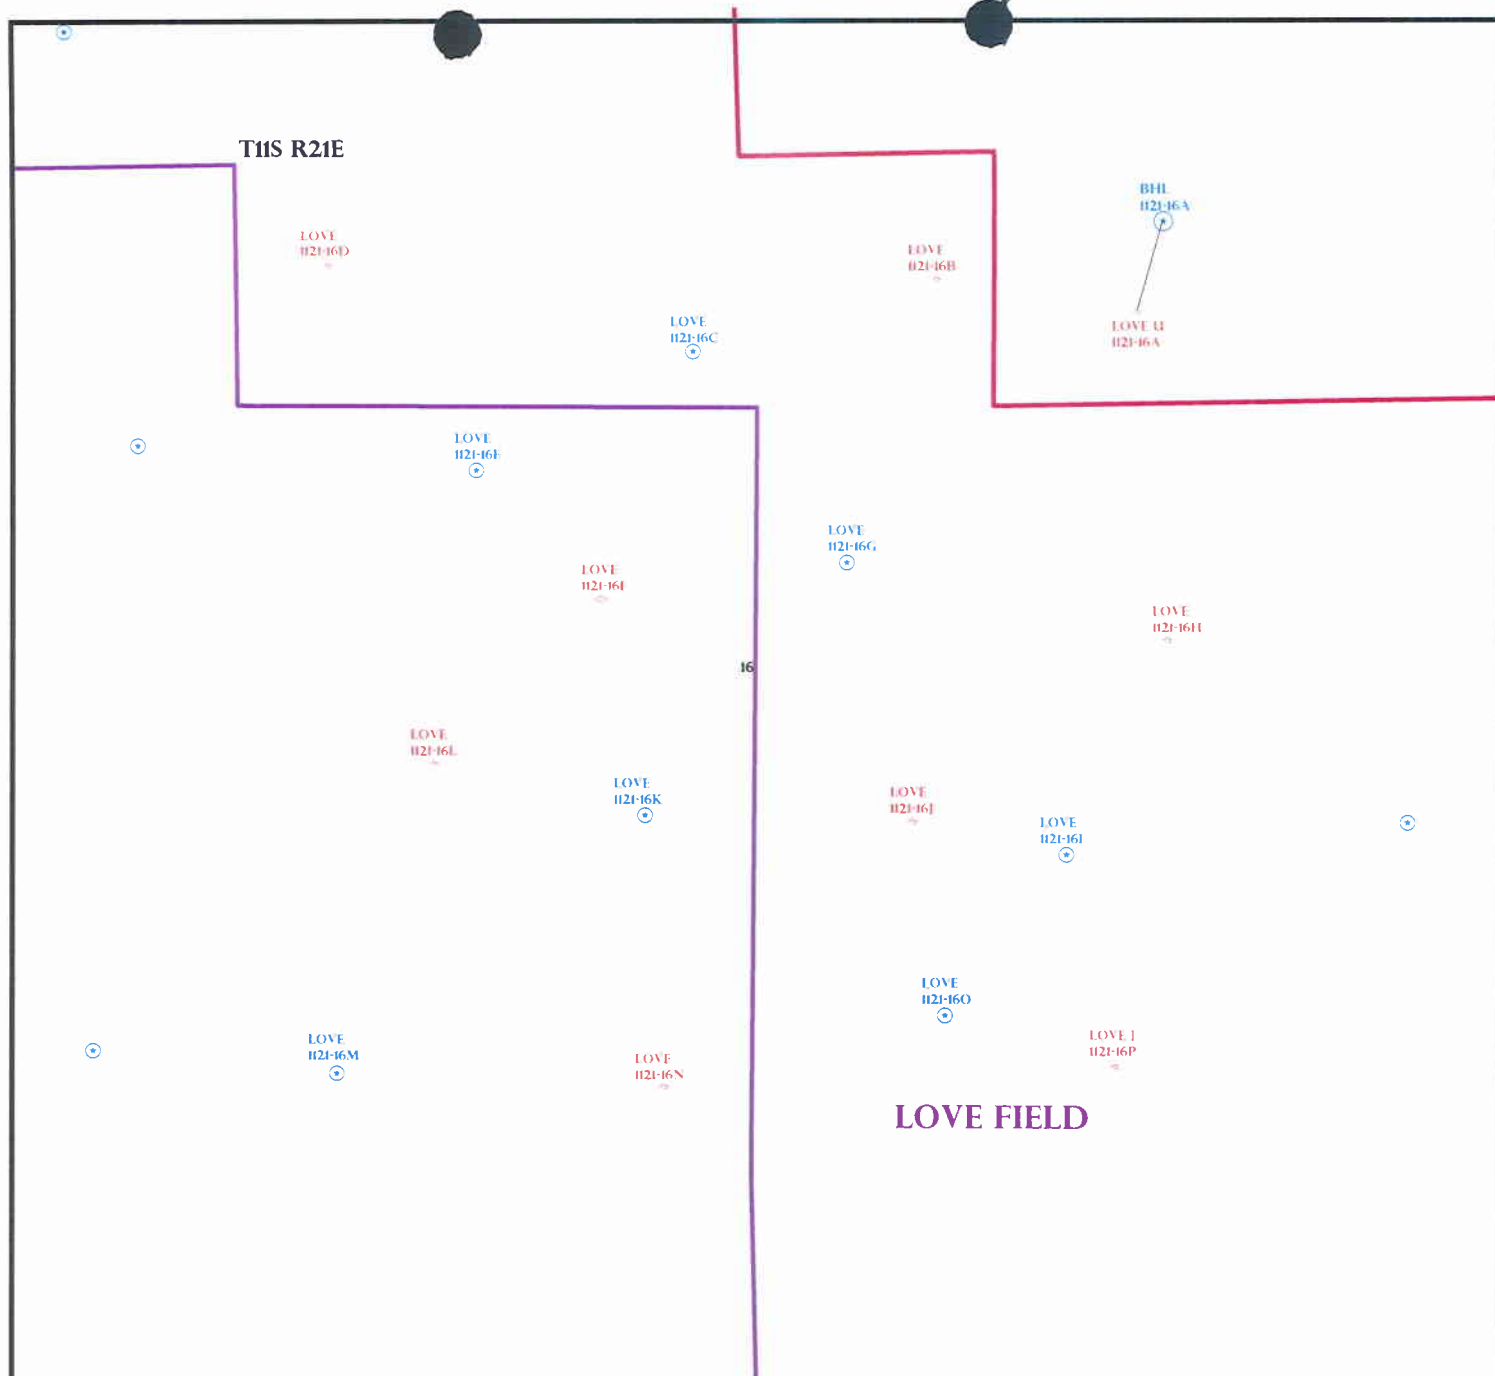

OPERATOR: KERR MCGEE O&G (N9550)

SEC: 16 T.11S R. 22E

FIELD: UNDESIGNATED (002)

COUNTY: UINTAH

SPACING: R649-3-3 / EXCEPTION LOCATION

#### Field Status


- ABANDONED
- ACTIVE
- COMBINED
- INACTIVE
- PROPOSED
- STORAGE
- TERMINATED

#### Unit Status

- EXPLORATORY
- GAS STORAGE
- NF PP OIL
- NF SECONDARY
- PENDING
- PI OIL
- PP GAS
- PP GEOTHERML
- PP OIL
- SECONDARY
- TERMINATED

#### Wells Status

- GAS INJECTION
- GAS STORAGE
- LOCATION ABANDONED
- NEW LOCATION
- PLUGGED & ABANDONED
- PRODUCING GAS
- PRODUCING OIL
- SHUT-IN GAS
- SHUT-IN OIL
- TEMP. ABANDONED
- TEST WELL
- WATER INJECTION
- WATER SUPPLY
- WATER DISPOSAL
- DRILLING



Utah Oil Gas and Mining



PREPARED BY: DIANA MASON  
DATE: 23-MARCH-2007



# Application for Permit to Drill

## Statement of Basis

4/12/2007

Utah Division of Oil, Gas and Mining

Page 1

<b>APD No</b>	<b>API WellNo</b>	<b>Status</b>	<b>Well Type</b>	<b>Surf Ownr</b>	<b>CBM</b>
342	43-047-39144-00-00		GW	S	No
<b>Operator</b>	KERR-MCGEE OIL & GAS ONSHORE, LP		<b>Surface Owner-APD</b>		
<b>Well Name</b>	LOVE 1121-16E		<b>Unit</b>		
<b>Field</b>	UNDESIGNATED		<b>Type of Work</b>		
<b>Location</b>	SWNW 16 11S 21E S 1598 FNL 1241 FWL GPS Coord (UTM) 621736E 4413358N				

### Geologic Statement of Basis

Kerr McGee proposes to set 1,600' of surface casing at this location. The depth to the base of the moderately saline water at this location is estimated to be at a depth of 4,100'. A search of Division of Water Rights records shows one water well within a 10,000 foot radius of the center of Section 16. The well is located near the center of Section 21. The well is owned by the BLM, is 610 feet deep and is used for stock watering. The surface formation at this site is the Uinta Formation. The Uinta Formation is made up of interbedded shales and sandstones. The sandstones are mostly lenticular and discontinuous and should not be a significant source of useable ground water. Production casing cement should be brought up above the base of the moderately saline ground water to isolate it from fresher waters uphole.

Brad Hill

4/12/2007

APD Evaluator

Date / Time

### Surface Statement of Basis

The general area is within the Love Unit of the upper Cottonwood Wash Drainage. The area is characterized by rolling hills and benches, which are frequently intersected by somewhat gentle draws, which flow into Cottonwood Wash. The draws are occasionally rimmed with steep side hills, which have exposed sand stone bedrock cliffs along the rims. Cottonwood Wash is an ephemeral drainage, which drains northerly approximately 13 miles to the White River. No seeps, springs or streams exist in the area.

This location is approximately 27 miles southeast of Ouray, Utah and is accessed by the Seep Ridge Road then by existing or planned oil field development roads to within 190 feet of the proposed site. New construction will be required from this point.

The proposed location is on a side slope under a ridge to the south, which has a rocky out-crop. A moderately steep draw exists to the north. Terrain is broken with several small swales running perpendicular thru the location. These draws will be diverted to both the east and west around the pad. Cottonwood Wash is approximately ¾ miles to the east. An existing road and pipeline is north of the location.

Both the surface and minerals are owned by SITLA. Jim Davis represented SITLA at the pre-site investigation. Mr. Davis had no concerns pertaining to this location. The selected location appears to be the best site for drilling and operating a well in the immediate area.

Floyd Bartlett

4/4/2007

Onsite Evaluator

Date / Time

### Conditions of Approval / Application for Permit to Drill

<b>Category</b>	<b>Condition</b>
Pits	A synthetic liner with a minimum thickness of 16 mils with a felt subliner shall be properly installed and maintained in the reserve pit.
Surface	Drainages adjacent to the proposed pad shall be diverted around the location.

# ON-SITE PREDRILL EVALUATION

## Utah Division of Oil, Gas and Mining

Operator KERR-MCGEE OIL & GAS ONSHORE, LP  
Well Name LOVE 1121-16E  
API Number 43-047-39144-0 APD No 342 Field/Unit UNDESIGNATED  
Location: 1/4,1/4 SWNW Sec 16 Tw 11S Rng 21E 1598 FNL 1241 FWL  
GPS Coord (UTM) 621741 4413362 Surface Owner

### Participants

Floyd Bartlett (DOGM), Jim Davis (SITLA), Carroll Estes, Tony Keznic, and Clay Einerson (Kerr McGee), David Kay (Uintah Engineering and Land Surveying), and Ben Williams (UDWR)

### Regional/Local Setting & Topography

The general area is within the Love Unit of the upper Cottonwood Wash Drainage. The area is characterized by rolling hills and benches, which are frequently intersected by somewhat gentle draws, which flow into Cottonwood Wash. The draws are occasionally rimmed with steep side hills, which have exposed sand stone bedrock cliffs along the rims. Cottonwood Wash is an ephemeral drainage, which drains northerly approximately 13 miles to the White River. No seeps, springs or streams exist in the area.

This location is approximately 27 miles southeast of Ouray, Utah and is accessed by the Seep Ridge Road then by existing or planned oil field development roads to within 190 feet of the proposed site. New construction will be required from this point.

The proposed location is on a side slope under a ridge to the south, which has a rocky out-crop. A moderately steep draw exists to the north. Terrain is broken with several small swales running perpendicular thru the location. These draws will be diverted to both the east and west around the pad. Cottonwood Wash is approximately ¾ miles to the east.

Both the surface and minerals are owned by SITLA. Jim Davis represented SITLA at the pre-site investigation. Mr. Davis had no concerns pertaining to this location. The selected location appears to be the best site for drilling and operating a well in the immediate area.

Ben Williams representing the UDWR stated the area is classified as yearlong critical habitat for antelope. He stated that the lack of water not forage is the limiting factor affecting the herd in the area. He recommended no restrictions for antelope. No other wildlife is expected to be significantly affected. He gave Jim Davis of SITLA and Carroll Estes of Kerr McGee a copy of his wildlife evaluation and a UDWR recommended seed mix to be used when re-vegetating the location.

ATV's were used to access the site.

### Surface Use Plan

#### Current Surface Use

Grazing  
Recreational  
Wildlife Habitat

#### New Road

Miles	Well Pad	Length	Src Const Material	Surface Formation
	Width			

#### Ancillary Facilities

### Waste Management Plan Adequate?

## Environmental Parameters

**Affected Floodplains and/or Wetland** N

### **Flora / Fauna**

Vegetation is a shrub type. A moderate stand of big sagebrush exists. A few spring annuals are also present..

Antelope, cattle, rabbits, coyotes, and small mammals, birds and raptors.

### **Soil Type and Characteristics**

**Erosion Issues** N

**Sedimentation Issues** N

**Site Stability Issues** N

**Drainage Diversion Required** Y

**Berm Required?** N

**Erosion Sedimentation Control Required?** N

**Paleo Survey Run?**

**Paleo Potential Observed?**

**Cultural Survey Run?** Y

**Cultural Resources?**

## Reserve Pit

### **Site-Specific Factors**

### **Site Ranking**

**Distance to Groundwater (feet)** >200

0

**Distance to Surface Water (feet)** >1000

0

**Dist. Nearest Municipal Well (ft)** >5280

0

**Distance to Other Wells (feet)** 300 to 1320

10

**Native Soil Type** Mod permeability

10

**Fluid Type** Fresh Water

5

**Drill Cuttings** Normal Rock

0

**Annual Precipitation (inches)** <10

0

**Affected Populations** <10

0

**Presence Nearby Utility Conduits** Not Present

0

**Final Score**

25

1

**Sensitivity Level**

### **Characteristics / Requirements**

The proposed reserve pit is 70' x 150' x 10' deep located in a cut on the southeast corner of the location. A 20 mil liner with a felt sub-liner is planned by Kerr McGee.

**Closed Loop Mud Required?** N

**Liner Required?** Y

**Liner Thickness** 16

**Pit Underlayment Required?** Y

## Other Observations / Comments


Ben Williams representing the UDWR stated the area is classified as yearlong critical habitat for antelope. He stated that the lack of water not forage is the limiting factor affecting the herd in the area. He recommended no restrictions for antelope. No other wildlife is expected to be significantly affected. He gave Jim Davis of SITLA and Carroll Estes of Kerr McGee a copy of his wildlife evaluation and a UDWR recommended seed mix to be used when re-vegetating the location.

ATV's were used to access the site

Floyd Bartlett  
**Evaluator**

4/4/2007  
**Date / Time**

Casing Schematic

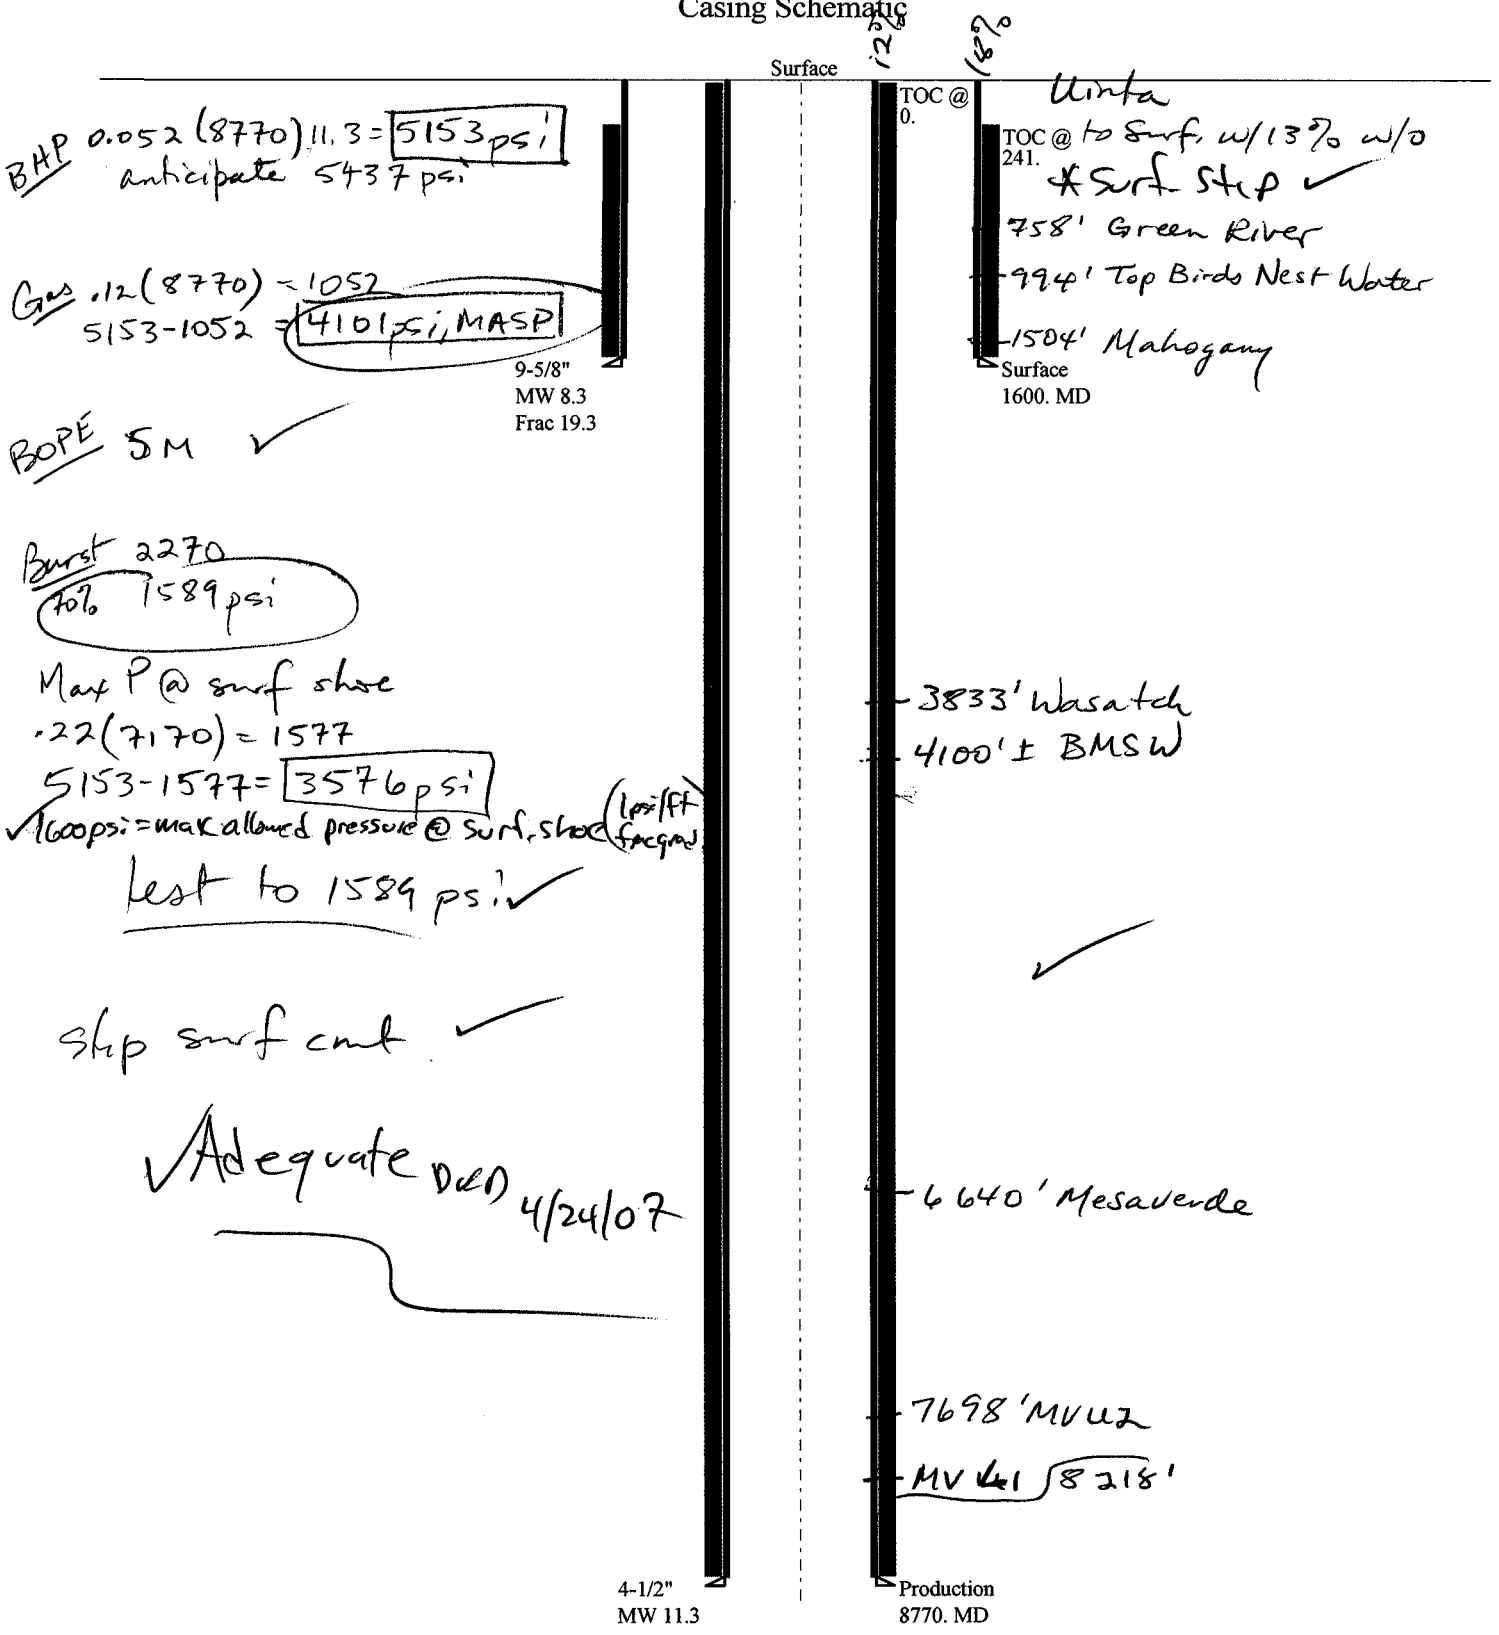

Well name:	<b>2007-04 Kerr McGee Love 1121-16E</b>	
Operator:	<b>Kerr McGee Oil &amp; Gas Onshore L.P.</b>	
String type:	Surface	Project ID: 43-047-39144
Location:	Uintah County, Utah	

**Design parameters:**
**Collapse**

Mud weight: 8.300 ppg  
Design is based on evacuated pipe.

**Minimum design factors:**
**Collapse:**

Design factor 1.125

**Burst:**

Design factor 1.00

**Environment:**

H2S considered? No  
Surface temperature: 75 °F  
Bottom hole temperature: 97 °F  
Temperature gradient: 1.40 °F/100ft  
Minimum section length: 1,400 ft

Cement top: 241 ft

**Burst**

Max anticipated surface pressure: 1,408 psi  
Internal gradient: 0.120 psi/ft  
Calculated BHP 1,600 psi

No backup mud specified.

**Tension:**

8 Round STC: 1.80 (J)  
8 Round LTC: 1.80 (J)  
Buttress: 1.60 (J)  
Premium: 1.50 (J)  
Body yield: 1.50 (B)

Tension is based on buoyed weight.

Neutral point: 1,405 ft

**Non-directional string.**
**Re subsequent strings:**

Next setting depth: 8,770 ft  
Next mud weight: 11.300 ppg  
Next setting BHP: 5,148 psi  
Fracture mud wt: 19.250 ppg  
Fracture depth: 1,600 ft  
Injection pressure: 1,600 psi

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Internal Capacity (ft³)
1	1600	9.625	32.30	H-40	ST&C	1600	1600	8.876	707

Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (Kips)	Tension Strength (Kips)	Tension Design Factor
1	690	1370	1.986	1600	2270	1.42	45	254	5.60 J

Prepared Helen Sadik-Macdonald  
by: Div of Oil, Gas & Minerals

Phone: (801) 538-5357  
FAX: (801) 359-3940

Date: April 17, 2007  
Salt Lake City, Utah

**Remarks:**

Collapse is based on a vertical depth of 1600 ft, a mud weight of 8.3 ppg. The casing is considered to be evacuated for collapse purposes. Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.

*Engineering responsibility for use of this design will be that of the purchaser.*

Well name:	<b>2007-04 Kerr McGee Love 1121-16E</b>	
Operator:	<b>Kerr McGee Oil &amp; Gas Onshore L.P.</b>	
String type:	Production	Project ID: 43-047-39144
Location:	Uintah County, Utah	

**Design parameters:**
**Collapse**

Mud weight: 11.300 ppg  
Design is based on evacuated pipe.

**Minimum design factors:**
**Collapse:**

Design factor 1.125

**Burst:**

Design factor 1.00

**Environment:**

H2S considered? No  
Surface temperature: 75 °F  
Bottom hole temperature: 198 °F  
Temperature gradient: 1.40 °F/100ft  
Minimum section length: 1,500 ft

Cement top: Surface

**Burst**

Max anticipated surface pressure: 3,219 psi  
Internal gradient: 0.220 psi/ft  
Calculated BHP 5,148 psi

No backup mud specified.

**Tension:**

8 Round STC: 1.80 (J)  
8 Round LTC: 1.80 (J)  
Buttress: 1.60 (J)  
Premium: 1.50 (J)  
Body yield: 1.50 (B)

**Non-directional string.**

Tension is based on buoyed weight.

Neutral point: 7,289 ft

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Internal Capacity (ft³)
1	8770	4.5	11.60	I-80	LT&C	8770	8770	3.875	765.3

Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (Kips)	Tension Strength (Kips)	Tension Design Factor
1	5148	6360	1.235	5148	7780	1.51	85	212	2.51 J

Prepared Helen Sadik-Macdonald  
by: Div of Oil, Gas & Minerals

Phone: (801) 538-5357  
FAX: (801) 359-3940

Date: April 17, 2007  
Salt Lake City, Utah

**Remarks:**

Collapse is based on a vertical depth of 8770 ft, a mud weight of 11.3 ppg. The casing is considered to be evacuated for collapse purposes. Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.

*Engineering responsibility for use of this design will be that of the purchaser.*



Kerr-McGee Oil & Gas OnShore LP  
1999 Broadway, Suite 3700, Denver, Colorado 80202  
303-296-3600 • Fax 303-296-3601

March 28, 2007

Ms. Diana Mason  
Division of Oil, Gas and Mining  
P.O. Box 145801  
Salt Lake City, UT 84114-6100

43-047. 39144

RE: Love 1121-16E  
T11S-R21E  
Section 16: SWNW  
1,598' FNL, 1,241' FWL  
Uintah County, Utah

Dear Ms. Mason:

Kerr-McGee Oil & Gas Onshore LP, formerly known as Westport Oil and Gas Company, L.P. has submitted a permit to drill the captioned well to test the Wasatch and Mesaverde formations. The well is located at an exception location to State Rule 649-3-2. The well location was moved for topographic reasons. Kerr-McGee owns 100% of the leasehold within 460 feet of the exception location of the offset lands and has no objection to the exception location.

Kerr-McGee requests your approval of this exception location. If you have any questions, call me at 720-264-2618. Thank you for your assistance.

Sincerely,

A handwritten signature in black ink, appearing to read 'W. Chris Latimer'.

W. Chris Latimer, CPL  
Senior Landman

cc: Raleen White

RECEIVED

APR 05 2007

DIV. OF OIL, GAS & MINING



STATE OF UTAH  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

FORM 9

**SUNDRY NOTICES AND REPORTS ON WELLS**

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL OIL WELL ☐ GAS WELL ☒ OTHER \_\_\_\_\_

2. NAME OF OPERATOR:  
KERR MCGEE OIL AND GAS ONSHORE LP

3. ADDRESS OF OPERATOR:  
1368 SOUTH 1200 EAST VERNAL UT 84078

PHONE NUMBER:  
(435) 781-7003

4. LOCATION OF WELL

FOOTAGES AT SURFACE: 1598' FNL 1241' FEL

COUNTY: UINTAH

QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SWNW 16 11S 21E

STATE: UTAH

5. LEASE DESIGNATION AND SERIAL NUMBER  
ML-46532

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

7. UNIT or CA AGREEMENT NAME:

8. WELL NAME and NUMBER:  
LOVE 1121-16E

9. API NUMBER:  
43-047-39144

10. FIELD AND POOL, OR WILDCAT:  
UNDESIGNATED

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input checked="" type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> OTHER: _____
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

An onsite was conducted on 4/4/07 with the Division of Oil, Gas and Mining Representative and SITLA Representative. It was decided to add a 4" pipeline approximately 1,100' +/- and an 8" pipeline approximately 4,750' +/-.

Please refer to the attached Topo D.

Accepted by the  
Utah Division of  
Oil, Gas and Mining  
For Record Only

NAME (PLEASE PRINT) Ramey Hoopes

TITLE Land Specialist I

SIGNATURE


DATE 4/18/2007

(This space for State use only)

RECEIVED

APR 23 2007

DIV. OF OIL, GAS & MINING

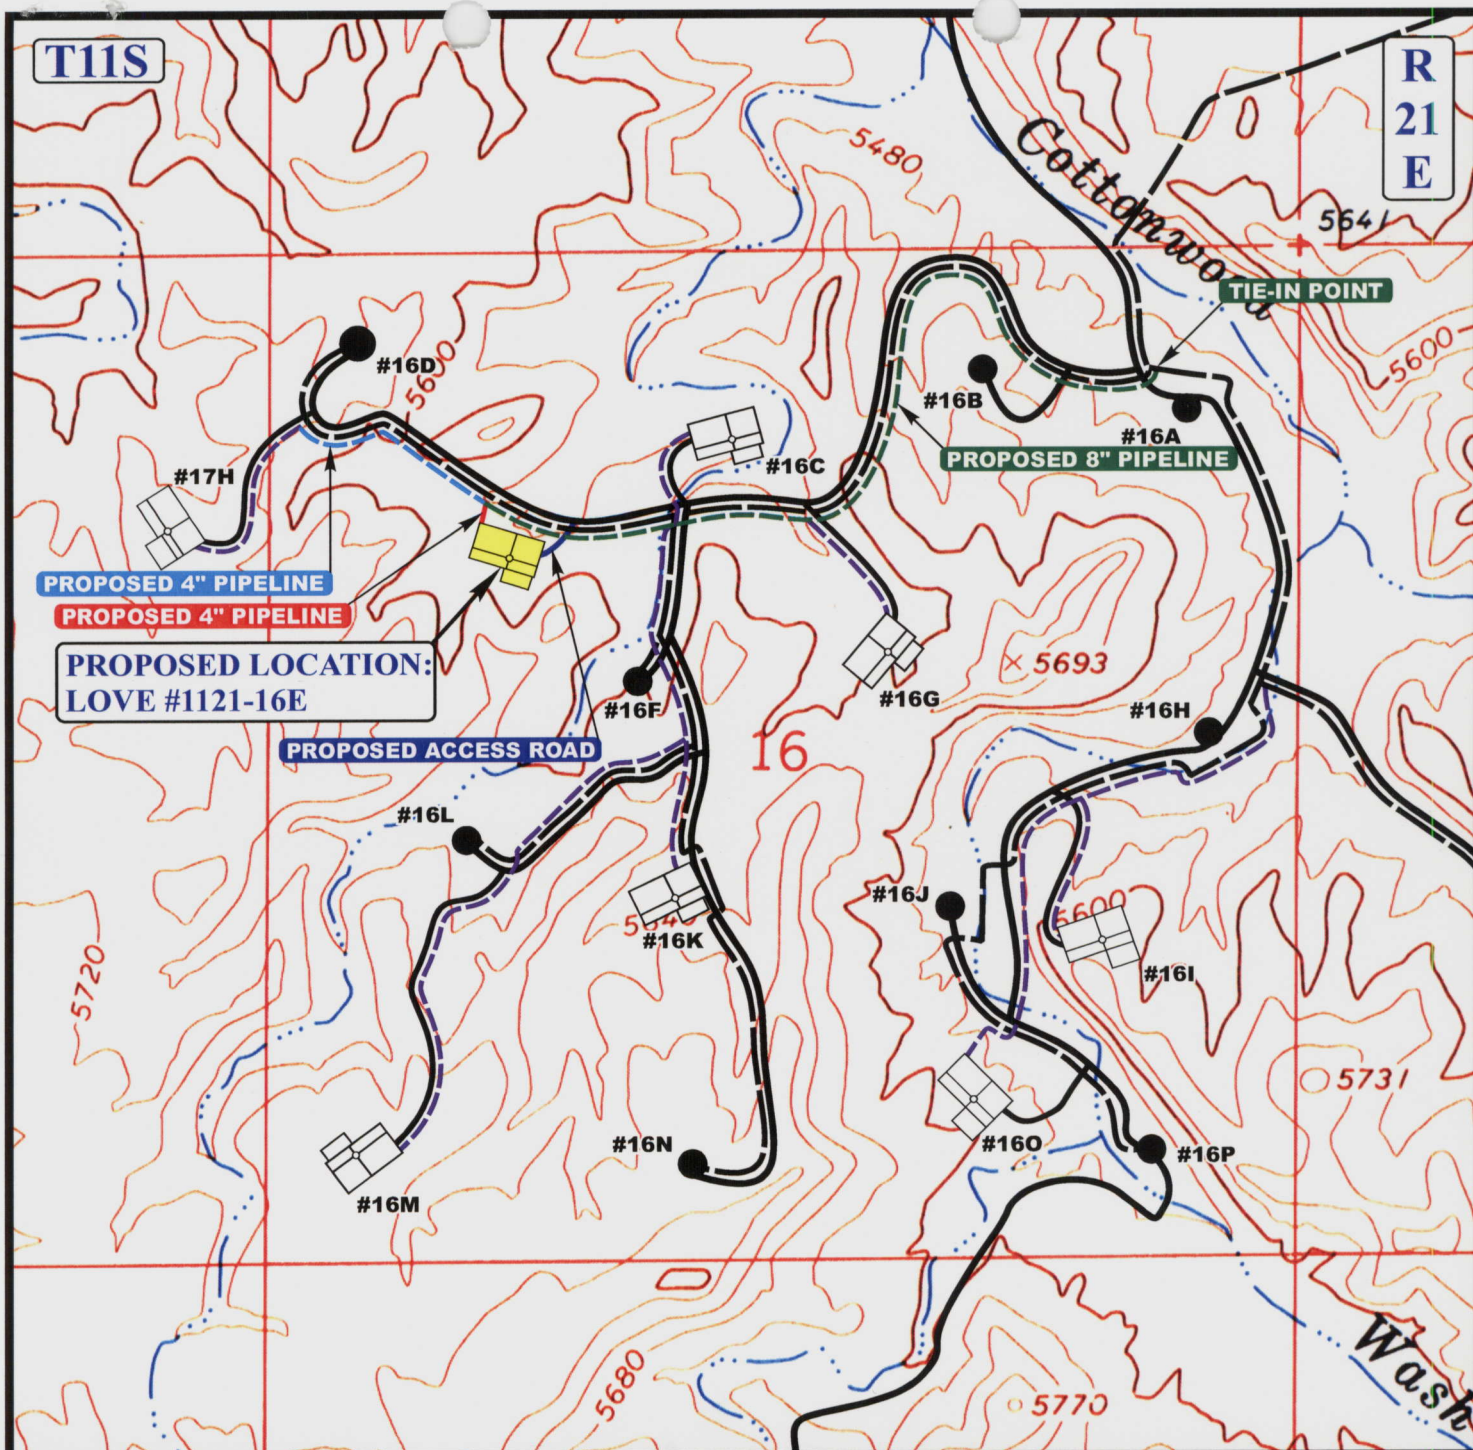

APPROXIMATE TOTAL 4" PIPELINE DISTANCE = 1,100' +/-

APPROXIMATE TOTAL 8" PIPELINE DISTANCE = 4,750' +/-

APPROXIMATE TOTAL 4" PIPELINE DISTANCE = 51' +/-

**LEGEND:**

- PROPOSED ACCESS ROAD
- EXISTING PIPELINE
- - - - - PROPOSED PIPELINE
- - - - - PROPOSED PIPELINE (SERVICING OTHER WELLS)

**N**

**Kerr-McGee Oil & Gas Onshore LP**

**LOVE #1121-16E**

**SECTION 16, T11S, R21E, S.L.B.&M.**

**1598' FNL 1241' FWL**



**Uintah Engineering & Land Surveying**

85 South 200 East Vernal, Utah 84078  
(435) 789-1017 \* FAX (435) 789-1813

**TOPOGRAPHIC  
MAP**

**12 19 06**  
MONTH DAY YEAR

SCALE: 1" = 1000'

DRAWN BY: B.C.

REVISED: 04-16-07C.P.



**From:** Ed Bonner  
**To:** Mason, Diana  
**Date:** 6/27/2007 11:46 AM  
**Subject:** Well Clearance

**CC:** Davis, Jim; Garrison, LaVonne; Hill, Brad; Hunt, Gil

The following wells have been given cultural resources clearance by the Trust Lands Cultural Resources Group:

Dominion Exploration & Production, Inc  
KC 16-32E (API 43 047 39219)  
KC 14-32E (API 43 047 39218)

EOG Resources, Inc  
Chapita Wells Unit 697-32 (API 43 047 39197)  
Chapita Wells Unit 698-32 (API 43 047 39216)  
Chapita Wells Unit 699-32 (API 43 047 39199)

Kerr McGee Oil & Gas Onshore LP  
Love 1121-16C (API 43 047 39143)  
Love 1121-16E (API 43 047 39144)  
Love 1121-16G (API 43 047 39145)  
Love 1121-16I (API 43 047 39146)  
Love 1121-16K (API 43 047 39147)  
Love 1121-16M (API 43 047 39148)  
Love 1121-16O (API 43 047 39149)  
State 1021-28P (API 43 047 39096)  
State 1021-28N (API 43 047 39097)  
State 1021-28M (API 43 047 39098)  
State 1021-28L (API 43 047 39099)  
NBU 1021-28F (API 43 047 39100)  
NBU 1021-28E (API 43 047 39101)  
NBU 1021-28D (API 43 047 39102)  
NBU 1021-28C (API 43 047 39103)  
NBU 1021-28B (API 43 047 39104)  
NBU 1021-28K (API 43 047 39105)  
NBU 1021-28I (API 43 047 39106)  
NBU 1022-24B (API 43 047 39389)

If you have any questions regarding this matter please give me a call.



JON M. HUNTSMAN, JR.  
Governor

GARY R. HERBERT  
Lieutenant Governor

# State of Utah

## DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER  
Executive Director

### Division of Oil Gas and Mining

JOHN R. BAZA  
Division Director

June 28, 2007

Kerr-McGee Oil & Gas Onshore, LP  
1368 South 1200 East  
Vernal, UT 84078

Re: Love 1121-16E Well, 1598' FNL, 1241' FWL, SW NW, Sec. 16, T. 11 South, R. 21 East,  
Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

Appropriate information has been submitted to DOGM and administrative approval of the requested exception location is hereby granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-39144.

Sincerely,

Gil Hunt  
Associate Director

er  
Enclosures

cc: Uintah County Assessor  
SITLA



**Operator:** Kerr-McGee Oil & Gas Onshore, LP  
**Well Name & Number** Love 1121-16E  
**API Number:** 43-047-39144  
**Lease:** ML 46532

**Location:** SW NW      **Sec.** 16      **T.** 11 South      **R.** 21 East

### **Conditions of Approval**

#### **1. General**

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

#### **2. Notification Requirements**

The operator is required to notify the Division of Oil, Gas and Mining of the following action during drilling of this well:

- 24 hours prior to cementing or testing casing – contact Dan Jarvis
- 24 hours prior to testing blowout prevention equipment – contact Dan Jarvis
- 24 hours prior to spudding the well – contact Carol Daniels
- Within 24 hours of any emergency changes made to the approved drilling program – contact Dustin Doucet
- Prior to commencing operations to plug and abandon the well – contact Dan Jarvis

The operator is required to get approval from the Division of Oil, Gas and Mining before performing any of the following actions during the drilling of this well:

- Plugging and abandonment or significant plug back of this well – contact Dustin Doucet
- Any changes to the approved drilling plan – contact Dustin Doucet

The following are Division of Oil, Gas and Mining contacts and their telephone numbers (please leave a voice mail message if the person is not available to take the call):

- Dan Jarvis at:           (801) 538-5338 office           (801) 942-0873 home
- Carol Daniels at:       (801) 538-5284 office
- Dustin Doucet at:       (801) 538-5281 office           (801) 733-0983 home

#### **3. Reporting Requirements**

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. Compliance with the State of Utah Antiquities Act forbids disturbance of archeological, historical, or paleontological remains. Should archeological, historical or paleontological remains be encountered during your operations, you are required to immediately suspend all operations and immediately inform the Trust Lands Administration and the Division of State History of the discovery of such remains.
5. Compliance with the Conditions of Approval/Application for Permit to Drill outlined in the Statement of Basis. (Copy Attached)
6. This proposed well is located in an area for which drilling units (well spacing patterns) have not been established through an order of the Board of Oil, Gas and Mining (the "Board"). In order to avoid the possibility of waste or injury to correlative rights, the operator is requested, once the well has been drilled, completed, and has produced, to analyze geological and engineering data generated therefrom, as well as any similar data from surrounding areas if available. As soon as is practicable after completion of its analysis, and if the analysis suggests an area larger than the quarter-quarter section upon which the well is located is being drained, the operator is requested to seek an appropriate order from the Board establishing drilling and spacing units in conformance with such analysis by filing a Request for Agency Action with the Board.
7. Surface casing shall be cemented to the surface.



STATE OF UTAH  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

FORM 9

**SUNDRY NOTICES AND REPORTS ON WELLS**

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		5. LEASE DESIGNATION AND SERIAL NUMBER: ML-46532
2. NAME OF OPERATOR: Kerr-McGee Oil & Gas Onshore, LP		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: NA
3. ADDRESS OF OPERATOR: PO Box 173779 CITY Denver STATE CO ZIP 80217-3779		7. UNIT or CA AGREEMENT NAME:
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1598 FNL & 1241 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SWNW 16 11S 21E		8. WELL NAME and NUMBER: Love 1121-16E 9. API NUMBER: 4304739144 10. FIELD AND POOL, OR WILDCAT: Natural Buttes Field
		COUNTY: Uintah STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA			
TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>APD Extension</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Kerr McGee Oil and Gas Onshore, LP respectfully requests a one year extension for Love 1121-16E, in order to complete drilling operations. The Utah Division of Oil, Gas, and Mining initially approved this APD on 6/28/2007.

Approved by the  
Utah Division of  
Oil, Gas and Mining

Date: 07-06-08  
By: [Signature]

COPY SENT TO OPERATOR

Date: 7.9.2008  
Initials: KS

NAME (PLEASE PRINT) <u>Victoria Marques</u>	TITLE <u>Regulatory Intern</u>
SIGNATURE <u>Victoria Marques</u>	DATE <u>6/26/2008</u>

(This space for State use only)

RECEIVED  
JUN 27 2008

DIV. OF OIL, GAS & MINING

**Application for Permit to Drill  
Request for Permit Extension  
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

**API:** 4304739144  
**Well Name:** Love 1121-16E  
**Location:** SWNW 1598 FNL 1241 FWL Sec. 16 T 11S R 21E  
**Company Permit Issued to:** Kerr-McGee Oil & Gas Onshore, LP  
**Date Original Permit Issued:** 6/28/2007

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes ☐ No ☒

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes ☐ No ☒

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes ☐ No ☒

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes ☐ No ☒

Has the approved source of water for drilling changed? Yes ☐ No ☒

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes ☐ No ☒

Is bonding still in place, which covers this proposed well? Yes ☒ No ☐

Victoria Marques  
Signature

6/26/2008  
Date

**Title:** Regulatory Intern


**Representing:** Kerr-McGee Oil & Gas Onshore, LP

RECEIVED

JUN 27 2008

DIV. OF OIL, GAS & MINING



<b>STATE OF UTAH</b> DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		<b>FORM 9</b>			
<b>SUNDRY NOTICES AND REPORTS ON WELLS</b>  Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		<b>5. LEASE DESIGNATION AND SERIAL NUMBER:</b> ML-46532			
<b>1. TYPE OF WELL</b> Gas Well		<b>6. IF INDIAN, ALLOTTEE OR TRIBE NAME:</b>			
<b>2. NAME OF OPERATOR:</b> KERR-MCGEE OIL & GAS ONSHORE, L.P.		<b>7. UNIT or CA AGREEMENT NAME:</b>			
<b>3. ADDRESS OF OPERATOR:</b> P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779		<b>8. WELL NAME and NUMBER:</b> LOVE 1121-16E			
<b>4. LOCATION OF WELL</b> <b>FOOTAGES AT SURFACE:</b> 1598 FNL 1241 FWL <b>QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:</b> Qtr/Qtr: SWNW Section: 16 Township: 11.0S Range: 21.0E Meridian: S		<b>9. API NUMBER:</b> 43047391440000			
<b>PHONE NUMBER:</b> 720 929-6007 Ext		<b>9. FIELD and POOL or WILDCAT:</b> LOVE			
<b>COUNTY:</b> UINTAH		<b>STATE:</b> UTAH			
<b>11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA</b>					
<b>TYPE OF SUBMISSION</b>	<b>TYPE OF ACTION</b>				
<input checked="" type="checkbox"/> <b>NOTICE OF INTENT</b> Approximate date work will start: 7/3/2009  <input type="checkbox"/> <b>SUBSEQUENT REPORT</b> Date of Work Completion:  <input type="checkbox"/> <b>SPUD REPORT</b> Date of Spud:  <input type="checkbox"/> <b>DRILLING REPORT</b> Report Date:	<table style="width: 100%; border: none;"> <tr> <td style="width: 33%; vertical-align: top;"> <input type="checkbox"/> ACIDIZE  <input type="checkbox"/> CHANGE TO PREVIOUS PLANS  <input type="checkbox"/> CHANGE WELL STATUS  <input type="checkbox"/> DEEPEN  <input type="checkbox"/> OPERATOR CHANGE  <input type="checkbox"/> PRODUCTION START OR RESUME  <input type="checkbox"/> REPERFORATE CURRENT FORMATION  <input type="checkbox"/> TUBING REPAIR  <input type="checkbox"/> WATER SHUTOFF  <input type="checkbox"/> WILDCAT WELL DETERMINATION         </td> <td style="width: 33%; vertical-align: top;"> <input type="checkbox"/> ALTER CASING  <input type="checkbox"/> CHANGE TUBING  <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS  <input type="checkbox"/> FRACTURE TREAT  <input type="checkbox"/> PLUG AND ABANDON  <input type="checkbox"/> RECLAMATION OF WELL SITE  <input type="checkbox"/> SIDETRACK TO REPAIR WELL  <input type="checkbox"/> VENT OR FLARE  <input type="checkbox"/> SI TA STATUS EXTENSION  <input type="checkbox"/> OTHER         </td> <td style="width: 33%; vertical-align: top;"> <input type="checkbox"/> CASING REPAIR  <input type="checkbox"/> CHANGE WELL NAME  <input type="checkbox"/> CONVERT WELL TYPE  <input type="checkbox"/> NEW CONSTRUCTION  <input type="checkbox"/> PLUG BACK  <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION  <input type="checkbox"/> TEMPORARY ABANDON  <input type="checkbox"/> WATER DISPOSAL  <input checked="" type="checkbox"/> APD EXTENSION          OTHER:       </td> </tr> </table>		<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER:
<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER:			
<b>12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.</b> Kerr-McGee Oil & Gas Onshore, L.P. (Kerr-McGee) respectfully requests an extension to this APD for the maximum time allowed. Please contact the undersigned with any questions and/or comments. Thank you.					
<div style="text-align: right;"> <b>Approved by the Utah Division of Oil, Gas and Mining</b> </div>		<b>Date:</b> July 13, 2009  <b>By:</b> 			
<b>NAME (PLEASE PRINT)</b> Danielle Piernot		<b>PHONE NUMBER</b> 720 929-6156			
<b>SIGNATURE</b> N/A		<b>TITLE</b> Regulatory Analyst			
<b>DATE</b> 6/30/2009					



## The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

### Request for Permit Extension Validation Well Number 43047391440000

**API:** 43047391440000

**Well Name:** LOVE 1121-16E

**Location:** 1598 FNL 1241 FWL QTR SWNW SEC 16 TWNP 110S RNG 210E MER S

**Company Permit Issued to:** KERR-MCGEE OIL & GAS ONSHORE, L.P.

**Date Original Permit Issued:** 6/28/2007

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? ☐ Yes ☒ No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? ☐ Yes ☒ No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? ☐ Yes ☒ No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? ☐ Yes ☒ No
- Has the approved source of water for drilling changed? ☐ Yes ☒ No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? ☐ Yes ☒ No
- Is bonding still in place, which covers this proposed well? ☒ Yes ☐ No

**Approved by the  
Utah Division of  
Oil, Gas and Mining**

**Signature:** Danielle Piernot

**Date:** 6/30/2009

**Title:** Regulatory Analyst **Representing:** KERR-MCGEE OIL & GAS ONSHORE, L.P.

**Date:** July 13, 2009

**By:** 

**RECEIVED** June 30, 2009



GARY R. HERBERT  
Governor

GREGORY S. BELL  
Lieutenant Governor

# State of Utah

## DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER  
Executive Director

### Division of Oil, Gas and Mining

JOHN R. BAZA  
Division Director

July 8, 2010

Kerr McGee O&G Onshore LP  
1368 South 1200 East  
Vernal, Utah 84078

43 047 39144  
LOVE 1121-16 E  
11S 21E 16

Re: APDs Rescinded for Kerr McGee Oil & Gas Onshore LP Uintah County

Ladies and Gentlemen:

Enclosed find the list of APDs that are being rescinded to Kerr McGee Oil & Gas Onshore LP. No drilling activities at these locations have been reported to the division. Therefore, approval to drill these wells is hereby rescinded, effective July 8, 2010.

A new APD must be filed with this office for approval prior to the commencement of any future work on the subject location.

If any previously unreported operations have been performed on this well location, it is imperative that you notify the Division immediately.

Sincerely,

Diana Mason  
Environmental Scientist

cc: Well File  
SITLA, Ed Bonner



<del>Natural Buttes Unit 921-16P</del>	<del>43-047-39254</del>
Natural Buttes Unit 1021-32D	43-047-39137
Natural Buttes Unit 1021-32E	43-047-39138
Natural Buttes Unit 1021-19M	43-047-38150
Natural Buttes Unit 1021-32C	43-047-39028
Natural Buttes Unit 1021-32F	43-047-39029
State 1021-32N	43-047-39129
State 1021-32M	43-047-39130
State 1021-32K	43-047-39132
State 1021-28P	43-047-39096
State 1021-28N	43-047-39097
State 1021-28L	43-047-39099
State 1021-28F	43-047-39100
State 1021-28E	43-047-39101
State 1021-28D	43-047-39102
State 1021-28C	43-047-39103
State 1021-28B	43-047-39104
State 1021-28K	43-047-39105
State 1021-28I	43-047-39106
Love 1121-16C	43-047-39143
Love 1121-16E	43-047-39144
Love 1121-16G	43-047-39145
Love 1121-16I	43-047-39146
Love 1121-16K	43-047-39147
Love 1121-16M	43-047-39148
Love 1121-16O	43-047-39149